




SKU	: 2.041FHB9300080D0000
Installation Method	: Track Mounted
Housing Material	: Extruded Aluminum
Housing Colour	: Black (RAL 9005)
Adjustability	: 180° rotational
Optic	: PC Lens / Louvre Black
UGR	: <22
Beam Angle [deg]	: 80°
System Power [W]	: 36W
Luminous Flux [lm]	: 3300lm
System Efficiency [lm/W]	: 92lm/W
CCT [K]	: 3000K
CRI [Ra]	: (Ra) >90
Chromaticity Tolerance	: 3
Mains Voltage [VAc]	: 220-240V / 50-60Hz
Power Supply	: DALI-2 dimmable
Ambient Temperature [degC]	: 35°C
Ingress Protection	: IP20
Light Source Energy Class	: D
Light Source Identifier	: 929003404706
Lifetime/Failure Rate [h]	: >100000h/L80B10

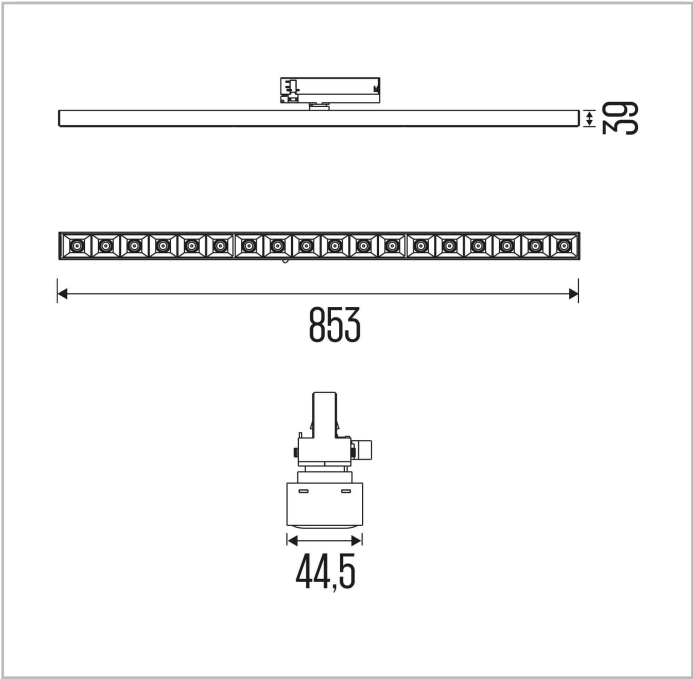

Electrical Safety Class	: Class II
Net Weight [kg]	: 1.40kg
Certifications/Declarations	: CE/UKCA
Warranty [Y]	: 5 years

All rated values @ ambient temperature of 25° C. Electric and photometric values are initially subject to a tolerance of +/- 10%. Tolerance of color temperature +/- 150K.
Technical data can change without prior notice.