

**ONE-SIDED EMERGENCY EXIT SIGNS**

**PANORAMA & PANORAMA LED**

**MATERIALS:**

White plastic body  
Opal plastic cover

**MOUNTING:**

Surface (wall)

**POWER SUPPLY:**

Self contained - 230VAC/50÷60Hz  
Central battery-220÷240VAC/50÷60Hz; 21.6VDC  
Central battery FZLV - 24VDC

**LIGHT SOURCE:**

8W fluorescent lamp  
1,2W LED

**CHARGING:**

Maximum 24h

**AUTONOMY AND BATTERIES:**

1h, 2h, 3h, Ni-Cd batteries

**INSULATION CLASS:**

II

**IP RATING:**

IP54

**VIEWING DISTANCE:**

30m

**AMBIENT TEMPERATURE:**



$t_a$ : 0°C÷40°C

**OPTIONS:**

SE - non maintained  
SA - maintained  
PT - manual test button  
AT - autotest  
RS - Rubic central monitoring  
FZLV - central battery FZLV 24V  
CB - central battery

**ADDITIONAL INFORMATION:**

LED indicator signalizes mains power supply and battery charge  
Deep discharge protection  
III class insulation of FZLV system

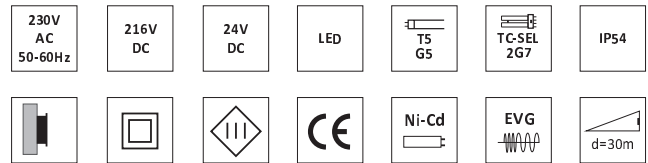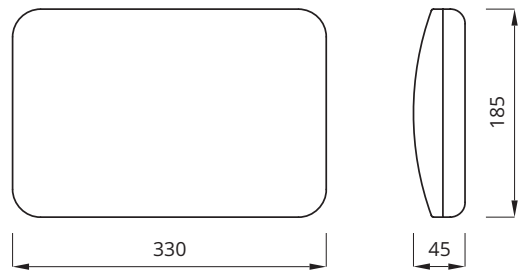

**SELF CONTAINED CONFIGURATION**

CODE	POWER [W]	AUTONOMY [h]			MODE		OPTION		
P	8	1	2	3	SE	SA	PT	AT	RS
PML	1.2	1	2	3	SE	SA	PT	AT	RS



\*see pictogram

**CENTRAL BATTERY CONFIGURATION**

CODE	POWER [W]	SYSTEM	OPTION	
P	8	CB	CBS	ADS
PML	1.2	CB	CBS	ADS

**FZLV SYSTEM CONFIGURATION**

CODE	POWER [W]	SYSTEM
PML	1.2	FZLV

**Legend:**

- SE - non maintained
- SA - maintained
- PT - manual test button
- AT - autotest
- RS - Rubic central monitoring
- FZLV - fixture for central battery FZLV 24 VDC
- CB - central battery
- CBS - central battery (circuit monitoring)
- ADS - central battery with address module ADS 20
- ADL - central battery with address module ADL
- P - fixture Panorama
- PML - fixture Panorama LED

\*Emergency exit sign fixtures do not include any pictogram in the set. Pictograms have to be chosen and ordered as a separate item.