

# ELR H3-I-SC-230AC/500AC-9 - Hybrid motor starter



2900546

<https://www.phoenixcontact.com/gb/products/2900546>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Hybrid motor starter for starting 3~ AC motors up to 550 V AC, with 230 V AC input, 9 A output current, and adjustable overload shutdown.

## Your advantages

- 22.5 mm wide
- Low-wear switching
- Space saving
- Long service life
- Reduction in wiring
- 3-phase loop bridges
- Adjustable current for bimetal function

## Commercial data

Item number	2900546
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	CK7423
Product key	CK7423
Catalog page	Page 35 (C-5-2019)
GTIN	4046356527736
Weight per piece (including packing)	294.7 g
Weight per piece (excluding packing)	205.06 g
Customs tariff number	85371098
Country of origin	DE

## Technical data

### Product properties

Product type	Hybrid motor starters
Product family	CONTACTRON
Operating mode	100% operating factor

### Electrical properties

Number of phases	3
Motor starter type	Direct starter
Maximum power dissipation for nominal condition	13.5 W
Switching frequency	≤ 2 Hz (Load-dependent)
Maximum power dissipation	16.1 W
Minimum power dissipation	2.6 W
Coordination type	1

### Supply

Rated control circuit supply voltage $U_S$	230 V AC
Control supply voltage range	85 V AC ... 253 V AC
Rated control supply current $I_S$	4 mA
Mains frequency	50/60 Hz
Protective circuit	Surge protection

### Insulation characteristics

Rated insulation voltage	500 V
Rated surge voltage	4 kV
Overvoltage category	III
Degree of pollution	2
Insulation characteristics between the control input and control supply voltage, and auxiliary circuit to the main circuit	Safe isolation (IEC 60947-1) at operating voltage ≤ 300 V AC
	Safe isolation (EN 50178) at operating voltage ≤ 300 V AC
	Basic insulation (IEC 60947-1) at operating voltage 300 V AC ... 500 V AC
	Safe isolation (EN 50178) at operating voltage 300 ... 500 V AC
Isolation characteristics between the control input and control supply voltage to auxiliary circuit	Safe isolation (IEC 60947-1) in the auxiliary circuit ≤ 300 V AC
	Safe isolation (EN 50178) in the auxiliary circuit ≤ 300 V AC

### Emergency tripping

Operate threshold	> 45 A
Response time	< 2 s

### Input data

#### Control

Input name	Control input
Rated actuating voltage $U_C$	230 V AC
Triggering voltage range	85 V AC ... 253 V AC

# ELR H3-I-SC-230AC/500AC-9 - Hybrid motor starter



2900546

<https://www.phoenixcontact.com/gb/products/2900546>

Rated actuating current $I_C$	7 mA (Input type 1)
Mains frequency	50 Hz 60 Hz 50/60 Hz
Switching threshold	44 V AC ("0" signal)
	85 V AC ("1" signal)
Typical turn-off time	< 70 ms

## Output data

### AC output

Rated operating voltage $U_e$	500 V AC
Operating voltage range	42 V AC ... 550 V AC
Rated operating current $I_e$	9 A (AC-51)
	6.5 A (AC-53a)
Mains frequency	50/60 Hz
Load current range	1.5 A ... 9 A (see to derating)
Trigger characteristic in acc. with IEC 60947-4-2	Class 10A
Cooling time	20 min. (for auto reset)
Leakage current	0 mA
Protective circuit	Surge protection

### Acknowledge output

Note	Confirmation: floating change-over contact, signal contact
Contact switching type	1 changeover contact
Switching capacity in accordance with IEC 60947-5-1	3 A (230 V, AC15)
	2 A (24 V, DC13)

## Connection data

### Control circuits

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section rigid	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section AWG	24 ... 14
Tightening torque	0.5 Nm ... 0.6 Nm
	5 lb <sub>F</sub> -in. ... 7 lb <sub>F</sub> -in.

### Load circuit

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section rigid	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section AWG	24 ... 14
Tightening torque	0.5 Nm ... 0.6 Nm

# ELR H3-I-SC-230AC/500AC-9 - Hybrid motor starter



2900546

<https://www.phoenixcontact.com/gb/products/2900546>

5 lb<sub>F</sub>-in. ... 7 lb<sub>F</sub>-in.

## Signaling

Status display	Yellow LED
Operating voltage display	Green LED
Error indication	Red LED

## Dimensions

Width	22.5 mm
Height	107 mm
Depth	114 mm

## Material specifications

Flammability rating according to UL 94	V0 (Housing)
--	--------------

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 70 °C (observe derating)
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	≤ 2000 m

## Approvals

### UL approval

Certificate	NLDX.E228652
-------------	--------------

### UL data

SCCR	100 kA (500 V AC (fuse: 30 A class CC/30 A class J (high fault)))
	5 kA (500 V AC (fuse: 20 A RK5 (standard fault)))
FLA	6.5 A (500 V AC)
Group installation	20 A (class RK5, SCCR 5kA, #24 - 14 AWG max. solid and stranded)
	30 A (class CC or J, SCCR 100kA, #24 - 14 AWG max, solid and stranded)
Category code	NLDX / NRNT

## Standards and regulations

### Standards/regulations

Standards/regulations	IEC 60947-1
	IEC 60947-4-2
	IEC 61508
	ISO 13849

## Mounting

# ELR H3-I-SC-230AC/500AC-9 - Hybrid motor starter




2900546

<https://www.phoenixcontact.com/gb/products/2900546>

Mounting type	DIN rail mounting
Assembly instructions	alignable, for spacing see derating
Mounting position	vertical (horizontal DIN rail, motor output below)

Drawings

Circuit diagram

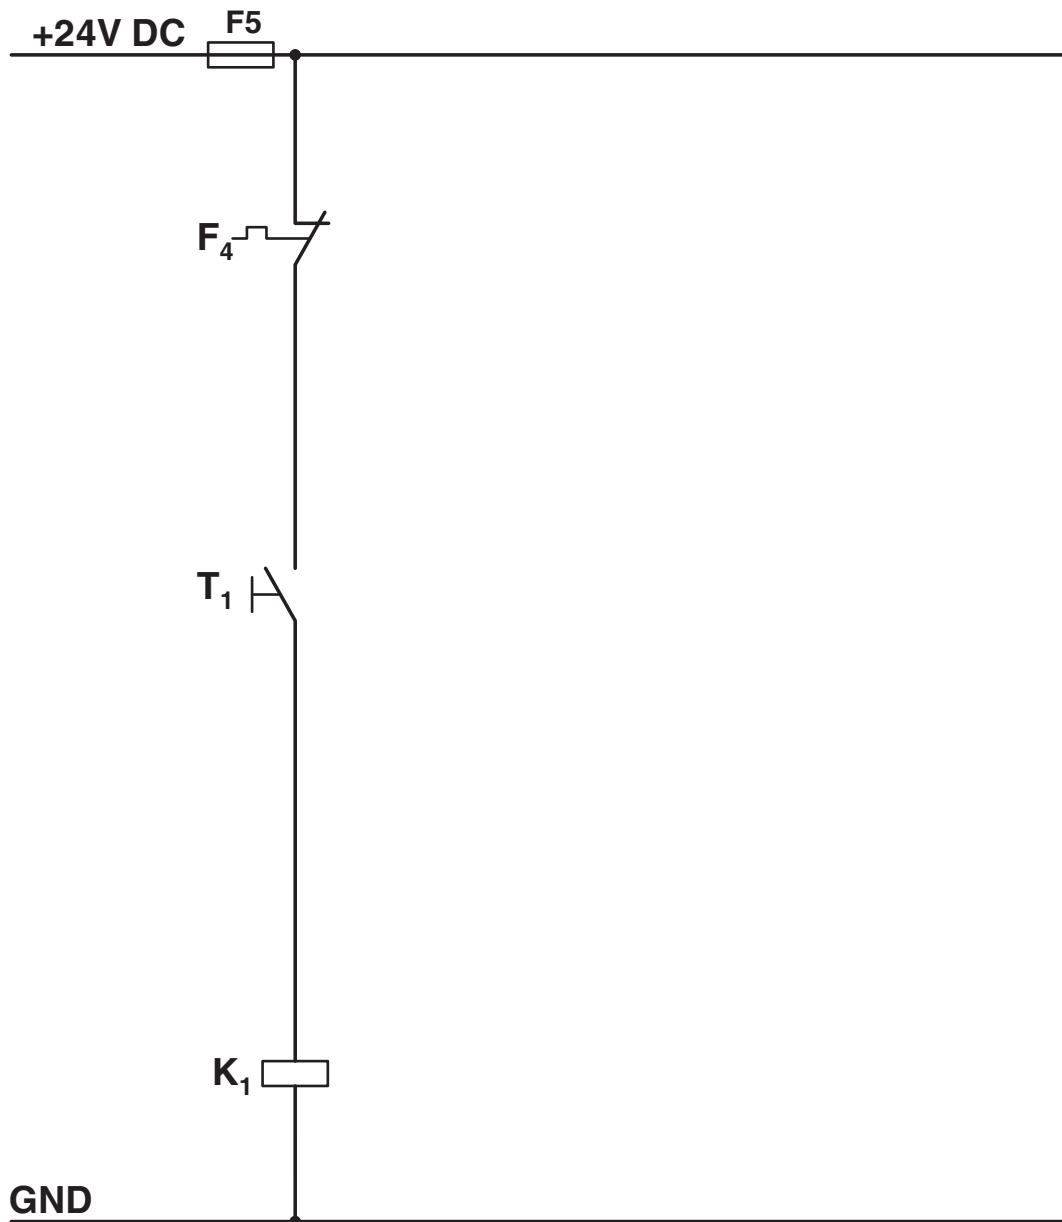



# ELR H3-I-SC-230AC/500AC-9 - Hybrid motor starter

2900546


<https://www.phoenixcontact.com/gb/products/2900546>

Circuit diagram

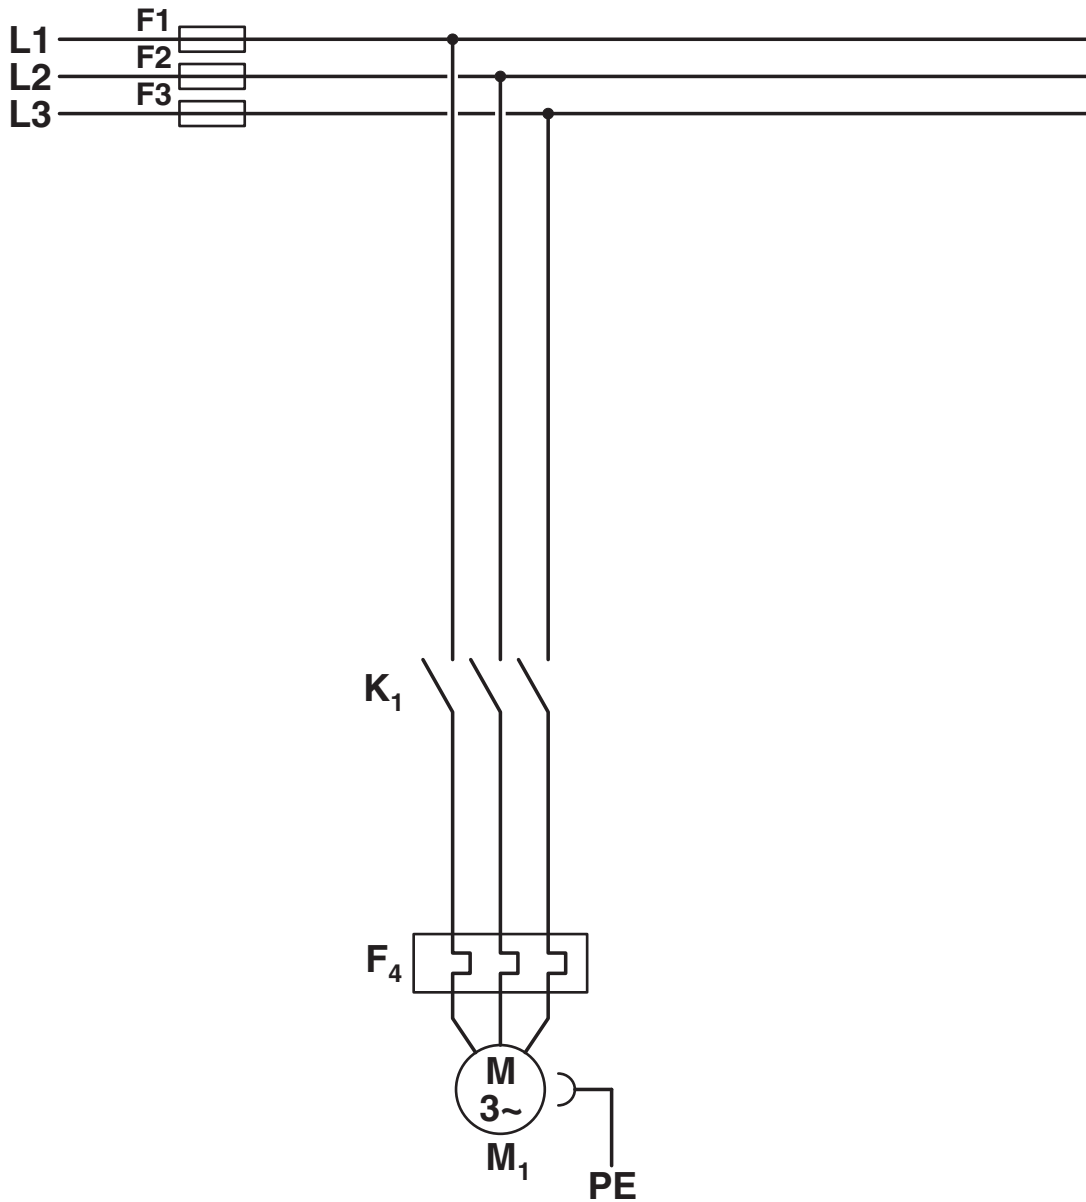

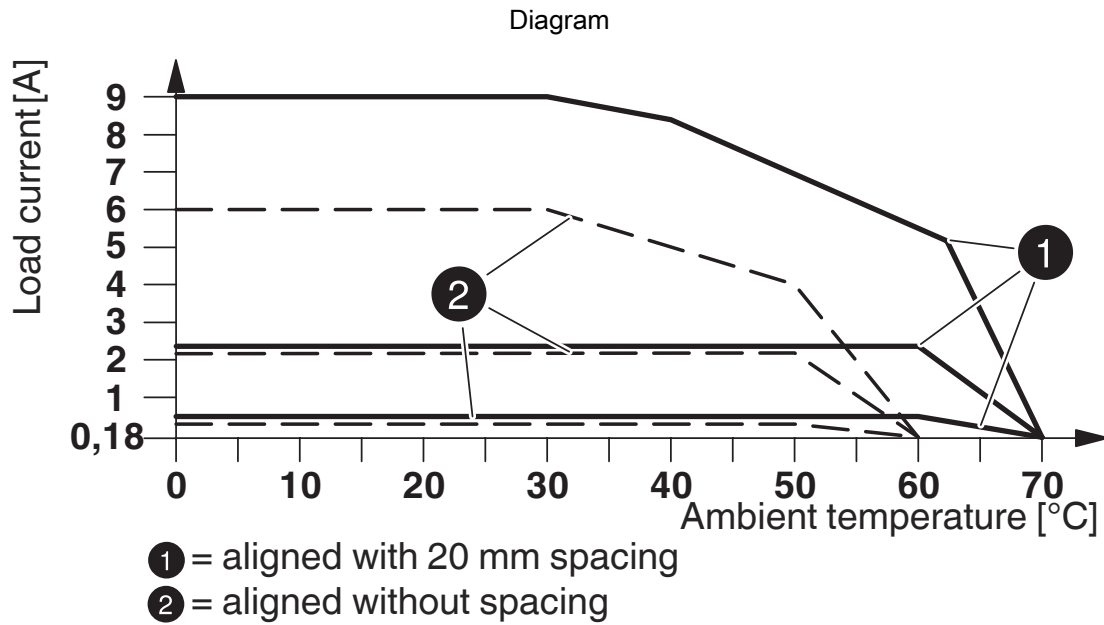

Derating diagram

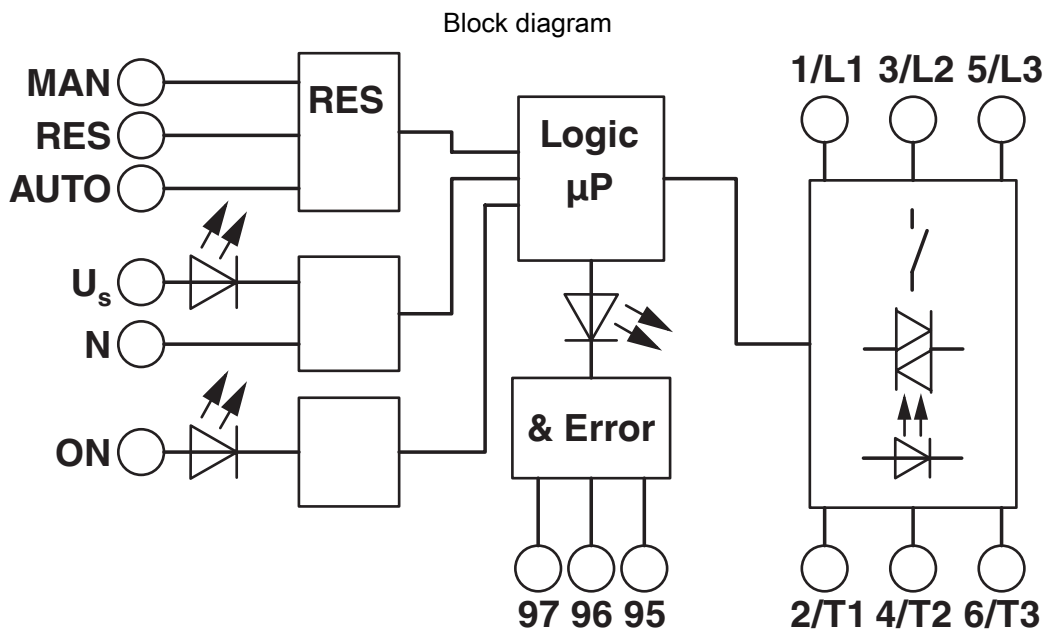


# ELR H3-I-SC-230AC/500AC-9 - Hybrid motor starter

2900546

<https://www.phoenixcontact.com/gb/products/2900546>

Circuit diagram

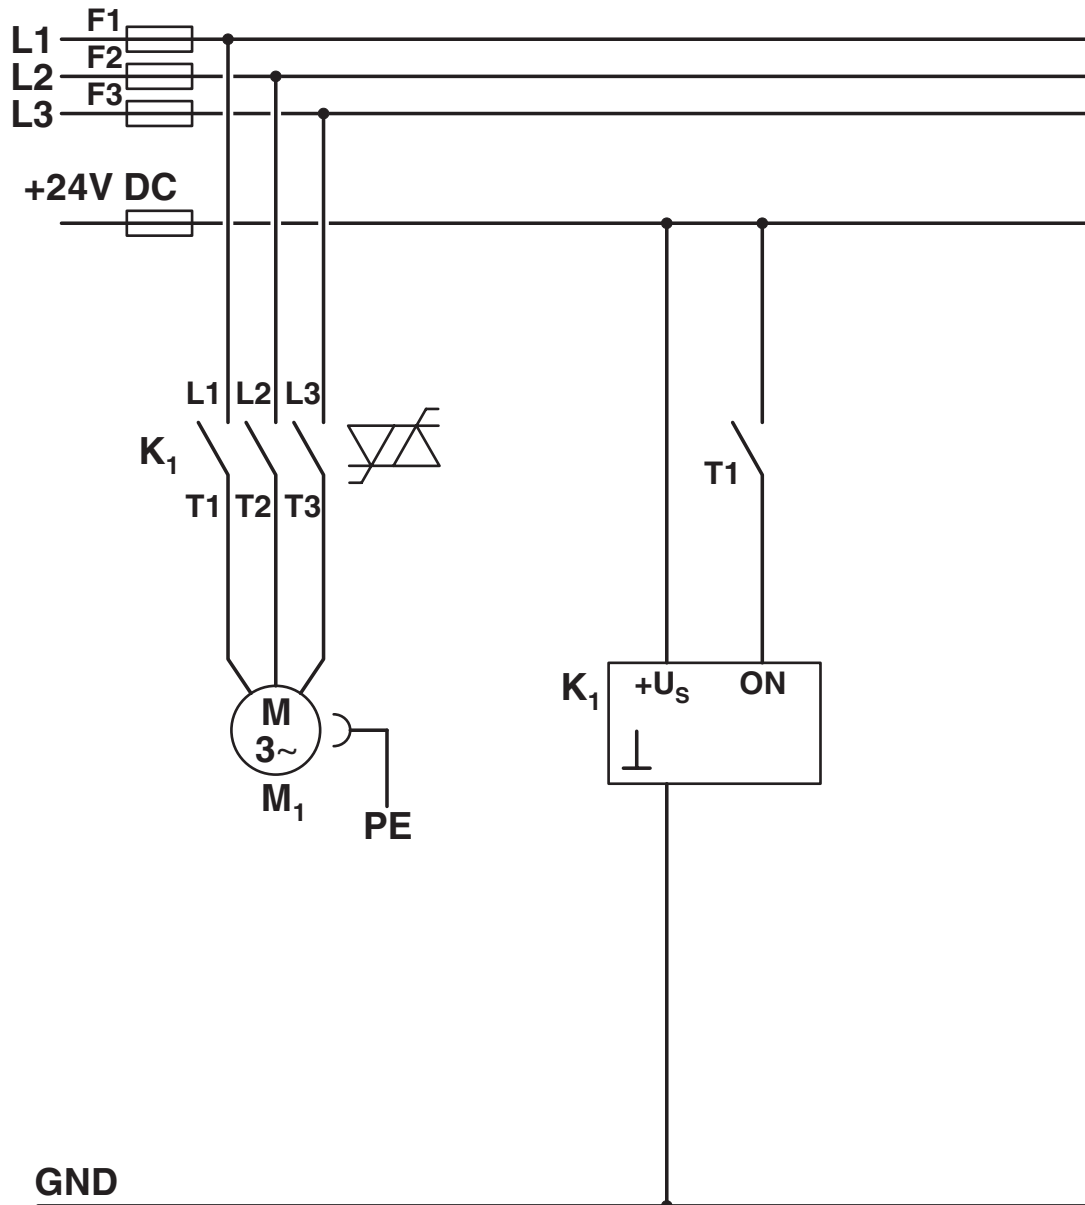

# ELR H3-I-SC-230AC/500AC-9 - Hybrid motor starter



2900546

<https://www.phoenixcontact.com/gb/products/2900546>

## Classifications

### ECLASS

ECLASS-11.0

27370905

### UNSPSC

UNSPSC 21.0

25173902

# ELR H3-I-SC-230AC/500AC-9 - Hybrid motor starter



2900546

<https://www.phoenixcontact.com/gb/products/2900546>

## Environmental product compliance

China RoHS	Environmentally Friendly Use Period = 50 years For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"
------------	--

# ELR H3-I-SC-230AC/500AC-9 - Hybrid motor starter



2900546

<https://www.phoenixcontact.com/gb/products/2900546>

## Accessories

### US-EMLP (15X5) - Plastic label

0828790

<https://www.phoenixcontact.com/gb/products/0828790>



Plastic label, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: adhesive, lettering field size: 15 x 5 mm, Number of individual labels: 189

---

### UC-EMLP (15X5) - Plastic label

0819301

<https://www.phoenixcontact.com/gb/products/0819301>



Plastic label, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: adhesive, lettering field size: 15 x 5 mm, Number of individual labels: 10

# ELR H3-I-SC-230AC/500AC-9 - Hybrid motor starter




2900546

<https://www.phoenixcontact.com/gb/products/2900546>

## EM-CPS-225 - Power distribution board

1002634

<https://www.phoenixcontact.com/gb/products/1002634>




Modular power distribution board with CrossLink<sup>®</sup> interface, 125 A, 3-pos., touch-proof and protection against polarity reversal, width: 225 mm

---

## EM-CPS-405 - Power distribution board

1002635

<https://www.phoenixcontact.com/gb/products/1002635>



Modular power distribution board with CrossLink<sup>®</sup> interface, 125 A, 3-pos., touch-proof and protection against polarity reversal, width: 405 mm

# ELR H3-I-SC-230AC/500AC-9 - Hybrid motor starter



2900546

<https://www.phoenixcontact.com/gb/products/2900546>

## EM-CPS-TB3/63A - Connection module

1002633

<https://www.phoenixcontact.com/gb/products/1002633>



Connection module with integrated spring-loaded terminals for cables from 1.5 to 16 mm<sup>2</sup>, 3-pos., maximum 63 A

---

## EM-CPS-DA-22,5F/16A - Adapter

1002668

<https://www.phoenixcontact.com/gb/products/1002668>



Device adapter with fuse holder for 16 A fuse (10x38/Class CC), CrossLink<sup>®</sup> interface and fixed DIN rail

# ELR H3-I-SC-230AC/500AC-9 - Hybrid motor starter



2900546

<https://www.phoenixcontact.com/gb/products/2900546>

## BRIDGE- 2 - Bridge

2900746

<https://www.phoenixcontact.com/gb/products/2900746>

3-phase loop bridge for CONTACTRON modules, with screw connection and 22.5 mm housing width, connecting cable: 0.3 m, with ferrules.



---

## BRIDGE- 3 - Bridge

2900747

<https://www.phoenixcontact.com/gb/products/2900747>

3-phase loop bridge for 3 CONTACTRON modules, with screw connection and 22.5 mm housing width, connecting cable: 0.3 m, with ferrules.



# ELR H3-I-SC-230AC/500AC-9 - Hybrid motor starter



2900546

<https://www.phoenixcontact.com/gb/products/2900546>

## BRIDGE- 4 - Bridge

2900748

<https://www.phoenixcontact.com/gb/products/2900748>

3-phase loop bridge for 4 CONTACTRON modules, with screw connection and 22.5 mm housing width, connecting cable: 0.3 m, with ferrules.



---

## BRIDGE- 5 - Bridge

2900749

<https://www.phoenixcontact.com/gb/products/2900749>

3-phase loop bridge for 5 CONTACTRON modules, with screw connection and 22.5 mm housing width, connecting cable: 0.3 m, with ferrules.



# ELR H3-I-SC-230AC/500AC-9 - Hybrid motor starter



2900546

<https://www.phoenixcontact.com/gb/products/2900546>

## BRIDGE- 6 - Bridge

2900750

<https://www.phoenixcontact.com/gb/products/2900750>

3-phase loop bridge for 6 CONTACTRON modules, with screw connection and 22.5 mm housing width, connecting cable: 0.3 m, with ferrules.



---

## BRIDGE- 7 - Bridge

2900751

<https://www.phoenixcontact.com/gb/products/2900751>

3-phase loop bridge for 7 CONTACTRON modules, with screw connection and 22.5 mm housing width, connecting cable: 0.3 m, with ferrules.



# ELR H3-I-SC-230AC/500AC-9 - Hybrid motor starter



2900546

<https://www.phoenixcontact.com/gb/products/2900546>

## BRIDGE- 8 - Bridge

2900752

<https://www.phoenixcontact.com/gb/products/2900752>

3-phase loop bridge for 8 CONTACTRON modules, with screw connection and 22.5 mm housing width, connecting cable: 0.3 m, with ferrules.



---

## BRIDGE- 9 - Bridge

2900753

<https://www.phoenixcontact.com/gb/products/2900753>

3-phase loop bridge for 9 CONTACTRON modules, with screw connection and 22.5 mm housing width, connecting cable: 0.3 m, with ferrules.



# ELR H3-I-SC-230AC/500AC-9 - Hybrid motor starter



2900546

<https://www.phoenixcontact.com/gb/products/2900546>

## BRIDGE-10 - Bridge

2900754

<https://www.phoenixcontact.com/gb/products/2900754>

3-phase loop bridge for 10 CONTACTRON modules, with screw connection and 22.5 mm housing width, connecting cable: 0.3 m, with ferrules.



---

## BRIDGE- 2-1M - Bridge

2901542

<https://www.phoenixcontact.com/gb/products/2901542>

3-phase loop bridge for 2 CONTACTRON modules, with screw connection and 22.5 mm housing width, connecting cable: 1 m



# ELR H3-I-SC-230AC/500AC-9 - Hybrid motor starter



2900546

<https://www.phoenixcontact.com/gb/products/2900546>

## BRIDGE- 3-1M - Bridge

2901655

<https://www.phoenixcontact.com/gb/products/2901655>

3-phase loop bridge for 3 CONTACTRON modules, with screw connection and 22.5 mm housing width, connecting cable: 1 m



---

## BRIDGE- 4-1M - Bridge

2901658

<https://www.phoenixcontact.com/gb/products/2901658>

3-phase loop bridge for 4 CONTACTRON modules, with screw connection and 22.5 mm housing width, connecting cable: 1 m



# ELR H3-I-SC-230AC/500AC-9 - Hybrid motor starter



2900546

<https://www.phoenixcontact.com/gb/products/2900546>

## BRIDGE- 5-1M - Bridge

2901544

<https://www.phoenixcontact.com/gb/products/2901544>

3-phase loop bridge for 5 CONTACTRON modules, with screw connection and 22.5 mm housing width, connecting cable: 1 m



---

## BRIDGE- 6-1M - Bridge

2901649

<https://www.phoenixcontact.com/gb/products/2901649>

3-phase loop bridge for 6 CONTACTRON modules, with screw connection and 22.5 mm housing width, connecting cable: 1 m



# ELR H3-I-SC-230AC/500AC-9 - Hybrid motor starter



2900546

<https://www.phoenixcontact.com/gb/products/2900546>

## BRIDGE- 2-3M - Bridge

2901543

<https://www.phoenixcontact.com/gb/products/2901543>

3-phase loop bridge for 2 CONTACTRON modules, with screw connection and 22.5 mm housing width, connecting cable: 3 m



---

## BRIDGE- 3-3M - Bridge

2901656

<https://www.phoenixcontact.com/gb/products/2901656>

3-phase loop bridge for 3 CONTACTRON modules, with screw connection and 22.5 mm housing width, connecting cable: 3 m



# ELR H3-I-SC-230AC/500AC-9 - Hybrid motor starter



2900546

<https://www.phoenixcontact.com/gb/products/2900546>

## BRIDGE- 4-3M - Bridge

2901659

<https://www.phoenixcontact.com/gb/products/2901659>

3-phase loop bridge for 4 CONTACTRON modules, with screw connection and 22.5 mm housing width, connecting cable: 3 m



---

## BRIDGE- 5-3M - Bridge

2901545

<https://www.phoenixcontact.com/gb/products/2901545>

3-phase loop bridge for 5 CONTACTRON modules, with screw connection and 22.5 mm housing width, connecting cable: 3 m



# ELR H3-I-SC-230AC/500AC-9 - Hybrid motor starter



2900546

<https://www.phoenixcontact.com/gb/products/2900546>

## BRIDGE- 6-3M - Bridge

2901697

<https://www.phoenixcontact.com/gb/products/2901697>

3-phase loop bridge for 6 CONTACTRON modules, with screw connection and 22.5 mm housing width, connecting cable: 3 m



---

## BRIDGE- 7-3M - Bridge

2901698

<https://www.phoenixcontact.com/gb/products/2901698>

3-phase loop bridge for 7 CONTACTRON modules, with screw connection and 22.5 mm housing width, connecting cable: 3 m



# ELR H3-I-SC-230AC/500AC-9 - Hybrid motor starter



2900546

<https://www.phoenixcontact.com/gb/products/2900546>

## BRIDGE- 8-3M - Bridge

2901700

<https://www.phoenixcontact.com/gb/products/2901700>

3-phase loop bridge for 8 CONTACTRON modules, with screw connection and 22.5 mm housing width, connecting cable: 3 m



---

## BRIDGE- 9-3M - Bridge

2901701

<https://www.phoenixcontact.com/gb/products/2901701>

3-phase loop bridge for 9 CONTACTRON modules, with screw connection and 22.5 mm housing width, connecting cable: 3 m



# ELR H3-I-SC-230AC/500AC-9 - Hybrid motor starter



2900546

<https://www.phoenixcontact.com/gb/products/2900546>

## BRIDGE-10-3M - Bridge

2901702

<https://www.phoenixcontact.com/gb/products/2901702>

3-phase loop bridge for 10 CONTACTRON modules, with screw connection and 22.5 mm housing width, connecting cable: 3 m



---

## BRIDGE- 2- 2M/0,3M - Bridge

2909897

<https://www.phoenixcontact.com/gb/products/2909897>

3-phase loop bridge for 2 CONTACTRON modules, with screw connection and 22.5 mm housing width, cable length between the modules: 0.3 m, connecting cable: 2 m



# ELR H3-I-SC-230AC/500AC-9 - Hybrid motor starter



2900546

<https://www.phoenixcontact.com/gb/products/2900546>

## BRIDGE- 3- 2M/0,3M - Bridge

2909898

<https://www.phoenixcontact.com/gb/products/2909898>



3-phase loop bridge for 3 CONTACTRON modules, with screw connection and 22.5 mm housing width, cable length between the modules: 0.3 m, connecting cable: 2 m

---

## BRIDGE- 4- 2M/0,3M - Bridge

2909899

<https://www.phoenixcontact.com/gb/products/2909899>



3-phase loop bridge for 4 CONTACTRON modules, with screw connection and 22.5 mm housing width, cable length between the modules: 0.3 m, connecting cable: 2 m

---

Phoenix Contact 2023 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd  
Halesfield 13, Telford  
Shropshire, TF7 4PG  
01952 681700  
[info@phoenixcontact.co.uk](mailto:info@phoenixcontact.co.uk)