

92900631 <CQ 36L50-730 IVS CL2 M60

LED 55W CQ_36L50-730IVS	CB	ISO 9223 C5	PLUG 11	IP66 IK08		CE		EAC		Ta25	
-------------------------	----	-------------	---------	-----------	--	----	--	-----	--	------	--


CiviTEQ

A small size LED road lighting lantern with 36 LEDs driven at 500mA with Pedestrian Crossing optic. Electronic, fixed output control gear. Class II electrical, IP66, IK08. Housing: Die-cast aluminium (EN AC-44300), Light grey 150 sanded textured (close to RAL9006). Enclosure: toughened flat glass. Screws: stainless steel, Ecolubric® treated. Supplied with Ø60mm spigot adaptor which can be fitted for post-top (0°/5°/10° tilt) or side-entry (-20°/-15°/-10°/-5°/0° tilt). Complete with 3000K LED. Surge protection: 10kV single pulse common mode and 8kV multipulse common mode and 6kV multipulse differential mode. If permanent DALI system is connected, 6kV multipulse common and differential mode.


Dimensions: 390 x 230 x 133 mm
 Luminaire input power: 55 W
 Luminaire luminous flux: 7704 lm
 Luminaire efficacy: 140 lm/W
 Weight: 8.5 kg
 Scx: 0.077 m²



TLG_CTEQ_F_SMTP36LEDPDB.jpg

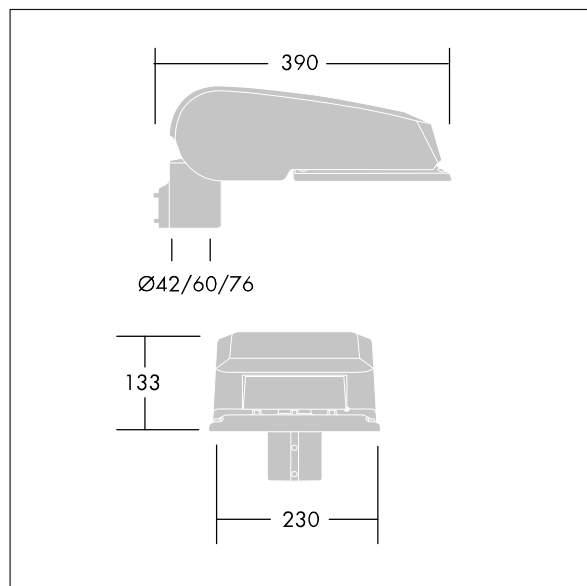

TLG_CETQ_M_S.wmf

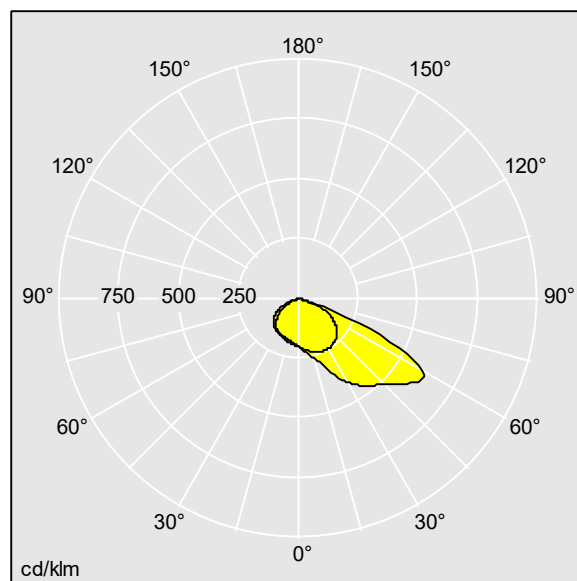

TL_CQS36L50IVS730.ltd

Lamp position: STD - standard
 Light Source: LED
 Luminaire luminous flux*: 7704 lm
 Luminaire efficacy*: 140 lm/W
 Colour Rendering Index min.: 70
 Correlated colour temperature*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 5
 Rated useful life (B10)*:
 L98 100000 h at 25 °C
 Ballast: 1x EL2
 Luminaire input power*: 55 W Power factor = 0.9
 Control: FO
 LOR: 1,00 ULOR: 0,00 DLOR: 1,00

This product contains light sources of energy efficiency class D.