

Omega Pro 2

92915524 OP2 3800-830 MPT HFIX Q600

THORN

LED 29W OP2MMP-830	CB	IEC EN 60598-1 RG 0	BEG	11	IP20 ↑IP40	IK03	CE	650°C	T _a 0 +35
--------------------	----	---------------------	-----	----	---------------	------	----	-------	-------------------------


Omega Pro 2

A recessed/surface/suspended, edge-lit LED luminaire.
LED driver, DALI-2 dimmable. Class II electrical,
IP40_IP20, Impact strength: IK03. Body: sheet steel,
finished white (close to RAL9016). Diffuser: UV-stabilised
polycarbonate microprismatic optic for maximised spacing.
Electrical connection via piano key terminals, loop-in/loop-
out possible. Complete with 3000K LED, Colour Rendering
Index min.: 80


Dimensions: 597 x 597 x 55 mm
Luminaire input power: 29.1 W
Luminaire luminous flux: 3550 lm
Luminaire efficacy: 122 lm/W
Weight: 5.05 kg



TLG_OMP2_F_QMPT_PDB.jpg

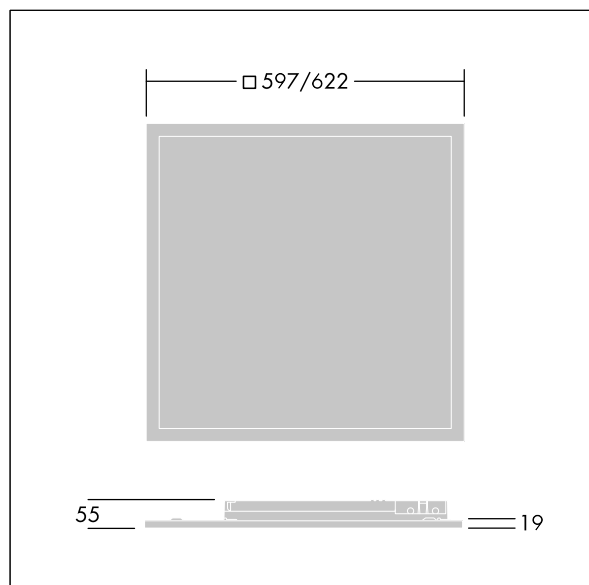

TLG_OMP2_M_Q.wmf

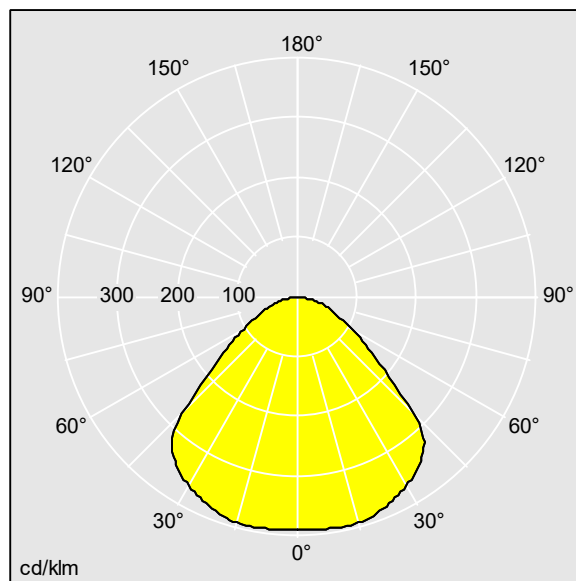

TLG_SP_0044170.ltd

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 3550 lm
Luminaire efficacy*: 122 lm/W
Colour Rendering Index min.: 80
Ballast: 1 x 28000672 LCA 45W 500-1400mA one4all
SR PRE
LOR: 1,00 ULOR: 0,00 DLOR: 1,00

Correlated colour temperature*: 3000 Kelvin
Chromaticity tolerance (initial MacAdam): 3
Rated median useful life*:
L90 50000 h at 25 °C
Luminaire input power*: 29.1 W Power factor = 0.97
Control: Dali2Dim dimmable to 10%
Maintenance category CIE 97: D - Enclosed IP2X

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Risk group

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting