
Datasheet | Light4U

TUBE R



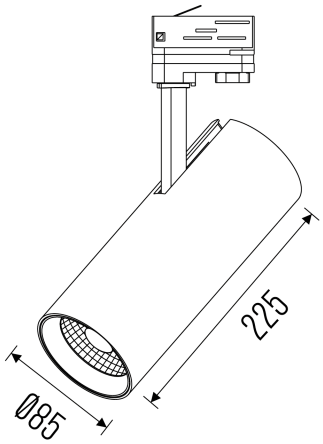

SKU	: 2.011AHA930003000000
Installation Method	: Track Mounted
Housing Material	: Die Cast Aluminum
Housing Colour	: White (RAL 9003)
Adjustability	: 350° rotational and 90° tiltable
Optic	: Facet Anodized Aluminum Reflector
Beam Angle [deg]	: 30°
System Power [W]	: 9.5W
Luminous Flux [lm]	: 1050lm
System Efficiency [lm/W]	: 111lm/W
CCT [K]	: 3000K
CRI [Ra]	: (Ra) >90
Chromaticity Tolerance	: 2
Mains Voltage [VAc]	: 220-240V / 50-60Hz
Power Supply	: On/Off (non-dimmable)
Ambient Temperature [degC]	: 35°C
Ingress Protection	: IP20
Light Source Energy Class	: D
Light Source Identifier	: 929003901880
Lifetime/Failure Rate [h]	: >100000h/L90B10
Electrical Safety Class	: Class I

TUBE R

Net Weight [kg]	: 1.10kg
Certifications/Declarations	: CE/UKCA
Warranty [Y]	: 5 years

All rated values @ ambient temperature of 25° C. Electric and photometric values are initially subject to a tolerance of +/- 10%. Tolerance of color temperature +/- 150K. Technical data can change without prior notice.

© 2026 Light4U BV. All rights reserved. Please visit light4u.com for more information.