


Data Sheet | Item Number: 2273-205

PUSH WIRE® splicing connector; for solid conductors; max. 2.5 mm²; 5-conductor; transparent housing; yellow cover; Surrounding air temperature: max 60°C (T60); 2,50 mm²; transparent



<https://www.wago.com/2273-205>

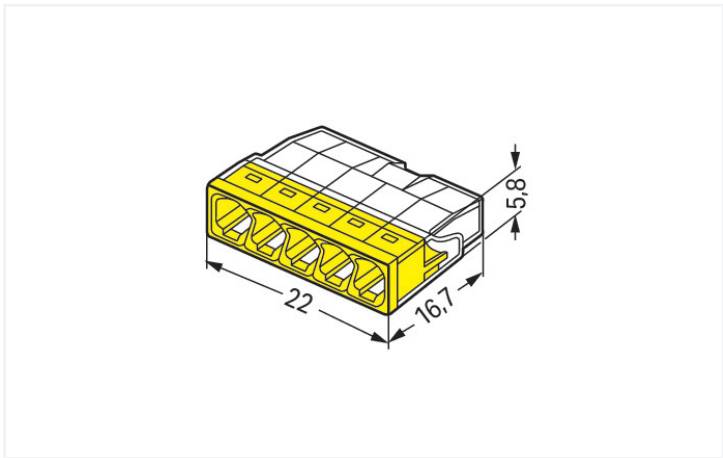

Color: ☐ transparent

Dimensions in mm

Push wire® splicing connector, 2273 Series, PUSH WIRE®

Our push wire® splicing connector (item number 2273-205) ensures effortless electrical installations. The 2273 Series PUSH WIRE® connectors for junction boxes provide safe, quick, and easy installations in any building, no matter the position or location. Conductors can only be connected to push wire® splicing connector if their strip length is 11 mm . Our splicing connector is rated for 450 V and is designed for use with a rated current of up to 24 A. It is therefore suitable for high-load applications. Featuring conductor terminals along with PUSH WIRE®, this connector outperforms the competition. Our PUSH WIRE® connection is the simple and reliable method for connecting solid conductors. Dimensions: (22 x 5.8 x 16.7) mm (width x height x depth). Depending on the type of conductor, push wire® splicing connector is designed for conductor cross sections ranging from 0.5 mm² to 2.5 mm².

Tin is used for coating the contact surfaces.

Notes	
General safety information	NOTICE: Observe installation and safety instructions! ▪ Only to be used by electricians! ▪ Do not work under voltage/load! ▪ Use only for proper use! ▪ Observe national regulations/standards/guidelines! ▪ Observe technical specifications for the products! ▪ Observe the number of permissible potentials! ▪ Do not use damaged/dirty components! ▪ Observe conductor types, cross-sections and strip lengths! ▪ Insert conductor until it hits the product's backstop! ▪ Use original accessories! To be sold only with installation instructions! in grounded power lines
Safety Information	



Electrical data						
Ratings per		IEC/EN 60998			Approvals per	
		UL 486C				
Overvoltage category	III	III	II	Use group	B	C
Pollution degree	3	2	2	Rated voltage	-	-
Nominal voltage	-	-	450 V	Rated current	-	-
Rated impulse withstand voltage	-	-	4 kV			
Rated current	-	-	24 A			

General information	
Wiring direction	Side-entry wiring

Connection Data	
Clamping units	5
Total number of potentials	1

Connection 1	
Connection technology	PUSH WIRE®
Actuation type	Push-in
Connectable conductor materials	Copper Aluminum
Connectable conductor materials (note)	Terminating Aluminum Conductors WAGO Spring-Clamp Terminal Blocks are suitable for solid aluminum conductors up to 4 mm²/12 AWG if WAGO Aluminum Contact Paste 249-130 is used for termination. Aluminum Contact Paste Advantages: ▪ Automatically destroys the oxide film during clamping. ▪ Prevents fresh oxidation at the clamping point. ▪ Prevents electrolytic corrosion between aluminum and copper conductors (in the same terminal block). ▪ Provides long-term protection against corrosion. For spring pressure connections with PUSH WIRE® connection technology, WAGO recommends that the aluminum conductor first be cleaned and then immediately inserted into the clamping unit filled with aluminum contact paste. It is also possible to apply WAGO Aluminum Contact Paste additionally on the whole surface of the aluminum conductor before termination. Please note that the nominal currents must be adapted to the reduced conductivity of the aluminum conductors:: 2.5 mm² = 16 A 4 mm² = 22 A
Solid conductor	0.5 ... 2.5 mm² / 20 ... 16 AWG
Strip length	11 mm / 0.43 inches
Wiring direction	Side-entry wiring



Physical data		
Width		22 mm / 0.866 inches
Height		5.8 mm / 0.228 inches
Depth		16.7 mm / 0.657 inches

Material data		
Note (material data)		Information on material specifications can be found here
Color		transparent
Cover color		yellow
Material group		IIIa
Insulation material (main housing)		Polycarbonate (PC)
Flammability class per UL94		V2
Clamping spring material		Chrome-nickel spring steel (CrNi)
Contact material		Electrolytic copper (E _{Cu})
Contact Plating		Tin
Fire load		0.03 MJ
Weight		1.6 g

Environmental requirements		
Ambient temperature (operation)		+60 °C
Continuous operating temperature		105 °C
Temperature marking per EN 60998		T60

Commercial data		
Product Group		7 (Push Wire Conn.)
PU (SPU)		1000 (100) pcs
Packaging type		Box
Country of origin		DE
GTIN		4050821027874
Customs tariff number		85369010000

Product Classification		
UNSPSC		39121409
eCl@ss 10.0		27-14-11-04
eCl@ss 9.0		27-14-11-04
ETIM 9.0		EC000446
ETIM 10.0		EC000446
ECCN		NO US CLASSIFICATION

Environmental Product Compliance		
RoHS Compliance Status		Compliant, No Exemption

Approvals / Certificates		
General approvals		Declarations of conformity and manufacturer's declarations
		
Approval	Standard	Certificate Name
cULus_Listed_667F Underwriters Laboratories Inc.	UL 486C	E69654
VDE VDE Prüf- und Zertifizierungsinstitut	EN 60998	40029794
		Approval
		EU-Declaration of Conformity WAGO GmbH & Co. KG
		UK-Declaration of Conformity WAGO GmbH & Co. KG

Approvals for marine applications		
		
Approval	Standard	Certificate Name
ABS American Bureau of Shipping	-	23-2417173-PDA
LR Lloyds Register	EN 60998	LR22207029TA
PRS Polski Rejestr Statków	EN 60998	TE/1093/880590/23

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 2273-205	

Documentation	
Bid Text	
ausschreiben.de 2273-205	

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 2273-205 	EPLAN Data Portal 2273-205 
	WSCAD Universe 2273-205 
	ZUKEN Portal 2273-205 

1 Compatible Products

1.1 Optional Accessories

1.1.1 Mounting adapter

1.1.1.1 Mounting accessories



Item No.: 2273-500
Mounting carrier; for single- and double-row con.; 2273 Series; for DIN-35 rail mounting/ screw mounting; orange

1.1.2 Tool


1.1.2.1 Aluminum contact paste



Item No.: 249-130
Syringe; Contents: Aluminum Contact Paste, 20 ml

Installation Notes

Conductor termination



Strip solid conductor to 11 mm/0.43 inch (see marking).

The transparent housing shows if conductors are fully inserted; within the colored base, a clear port shows if the conductor's strip length is correct. Conductors are correctly stripped if the clear port shows no bare conductor on the unprinted connector side. Picture shows center conductor with exceeded strip length.

Termination: Insert the stripped solid conductor until it hits the backstop.

Removal: Hold conductor to be removed and twist alternately left and right while pulling the connector.

Testing



Testing via test port opposite to conductor entry.