

Features

- START Waterproof Slim is a LED integrated polycarbonate housing luminaire with easy to access electrical terminal through bayonet lock end caps and tool-free electrical connection due to push-in terminal. Flexible installation as mounting brackets can be positioned freely on the luminaire. 4650 / 2300lm (selected by DIP switch), 34.5 / 17W, 135 / 135lm/W and 100,000 hours lifespan L70B50. SDCM < 5; IP66; IK08; Class II; 1240mm x 70mm x 73mm.


Product Overview

Product name	START Waterproof Slim 1200 IP66 2300/4650lm 840
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
General application	Logistics & Industry
ETIM Class	EC002892
E-number FI	4357160
Fixture luminous flux (lm)	4650
Luminaire efficacy (lm/W)	135
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	120
Photobiological Risk Group	RG0
Total power consumption (W)	34.5
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes with restrictions

START Waterproof Slim 1200 IP66 2300/4650lm 840 0046426

LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 7035 - Light grey
IP rating	IP66
IK rating	IK08
Product EAN number	5410288464268
Warranty	5 years
Dimming method	Other

Photometry

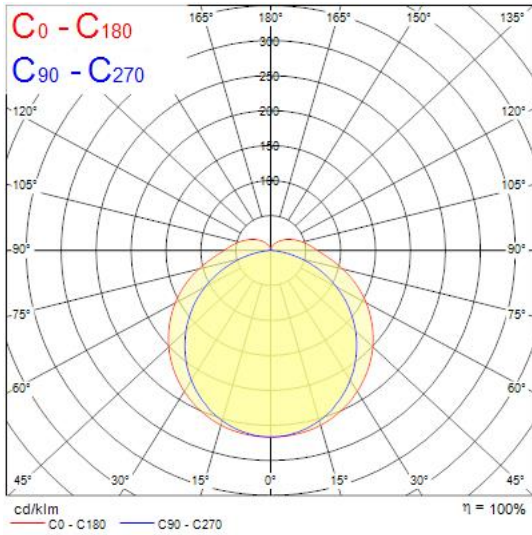

Technical drawings

