



COLLINGWOOD
LIGHTING



GUARANTEE / WARRANTY

4 year extended warranty available

H2 Pro Extreme

IP65, All weather downlight

FEATURES

Wattage	4.6W	Dimmable	Yes
Flicker free	Yes	Input	Mains
IP Rating	IP65	LED lifetime	40,000h L70, B10

PHOTOMETRICS @ 25°C

Colour	Beam angle	Product code	CRI	lm	lm/W	lx at 1m
4000K	38°	DL48938MW40	>80Ra	490	106	873
3000K	38°	DL48938MW30	>80Ra	460	100	820

INSTALLATION INFORMATION

Weight	185g	Inrush current	1.0A 0.25ms
Cut-out size	Ø 65-75mm	Construction material	Aluminium
Bathroom zone	1	Maximum ceiling thickness	30mm
Face temperature	40°C	Ambient temperature	40°C

WIRING INFORMATION

Cable / flying lead	0.15m (Class II)
Type of wiring required	Parallel (mains) 220-240V AC 50/60Hz

LED DRIVERS

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
N/A (integrated SELV driver)	220-240V	SELV	Yes (mains)	1	N/A	N/A

ACCESSORIES

Product code	Description
N/A	No accessories required

FEATURES & BENEFITS

IP65 from the front and back ensuring complete protection against the elements


38° beam angle

Dimmable for ultimate flexibility

Corrosion resistant technology

Complete with matt white bezel

Designed for external use

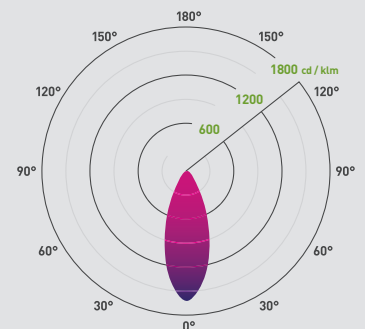

Beam angle: 38°

Additional diagrams available at collingwoodlighting.com

