

SLC

Developed by
The Light Group




High impact
resistance //
IK10

Robust ceiling and wall luminaire Perfect for facades

Dio

SLC Developed by
The Light Group


- Easy installation
- Robust luminaire with IK10 and IP65
- Through wiring
- Switch for selecting colour temperature (2700K/3000K/4000K)

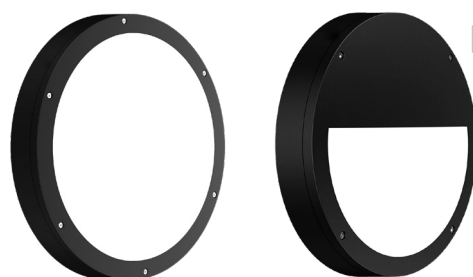

Rehab friendly



Read more and
order here
On stock!



H:59

Ø:275

Art.no. Artikelnr.		Colour Farbe	Power Leistung	Luminous flux Lumen	Colour temperature Lichtfarbe	CRI	Dimensions (ØxH) Maße (ØxH)
SLC1400	Open	● RAL9005	18W	1330-1550 lm	● 2700K / ● 3200K / ● 4000K	80+	Ø: 275 x 59 mm
SLC1401	Eye	● RAL9005	7W	660-735 lm	● 2700K / ● 3200K / ● 4000K	80+	Ø: 275 x 59 mm
SLC1403	Open DALI	● RAL9005	18W	1330-1550 lm	● 2700K / ● 3200K / ● 4000K	80+	Ø: 275 x 59 mm
SLC1404	Eye DALI	● RAL9005	7W	660-735 lm	● 2700K / ● 3200K / ● 4000K	80+	Ø: 275 x 59 mm

www.tlg.no // www.thelightgroup.de

