

EXIT L

AC
220-240V
50-60Hz

DC
176-275V

DC
24V

DC
48V

LED

IP65

IK08



KM 618355
BS-EN 60598-2-22



MATERIALS

White, grey or black polycarbonate body • Transparent polycarbonate cover

MOUNTING

Surface • Optionally recessed⁽¹⁾ • Optionally pendant⁽²⁾

POWER SUPPLY

Self contained – 220 - 240VAC/50 - 60Hz
Central battery – 220 - 240VAC/50 - 60Hz; 176 - 275VDC
Central battery FZLV II – 48VDC
Central battery FZLV – 24VDC

LIGHT SOURCE

1W, 2W, 3W, 6W LED
Colour temperature: 6000K
Lifetime: 50000h

CHARGING

Standard: max. 24h
Premium: max. 12h; energy-saving electronic charger

AUTONOMY AND BATTERIES

Standard: 1h or 3h, Ni-Cd 3,6V batteries
Premium: 1h or 3h, LiFePO₄ 6,4V batteries

INSULATION CLASS

II or III

IP & IK RATING

IP65, IK08

AMBIENT TEMPERATURE

Self-contained: t_a : 0°C ÷ 40°C • t_a : -25°C ÷ 40°C – together with heater for low temperatures
Central battery: t_a : -25°C ÷ 50°C

OPTIONS

SE – non maintained • SA – maintained • AT – autotest • PT – manual test button
• RU – Rubic UNA central monitoring • RW – Rubic UNA Wireless central monitoring
• RD – DALI central monitoring • FZLV – central battery FZLV 24VDC • FZLV2 – central battery FZLV II 48VDC • CB – central battery

ADDITIONAL INFORMATION

LED indicator signalizes mains power supply and battery charge • Deep discharge protection
• Optional adaptation of the fixture for low temperatures up to -25°C with HTR 25 • III class of insulation of FZLV and FZLV2 version • ⁽¹⁾ see accessory for recessed mounting, RW option not available • ⁽²⁾ see accessory for pendant mounting

DIMENSIONS [mm]



SELF-CONTAINED CONFIGURATION

	CODE	POWER	MODULE	AUTONOMY [h]		MODE		OPTIONS			COLOR			
STANDARD	ETL	1W	E C	1	3	SE	SA	PT	AT	X	WH	GR	BL	
		2W	E C	1	3	SE	SA	PT	AT	X	WH	GR	BL	
		3W	E C	1	3	SE	SA	PT	AT	X	WH	GR	BL	
PREMIUM	ETL	1W	B	1	3	SE	SA	AT	RU	RW	RD	WH	GR	BL
		2W	B	1	3	SE	SA	AT	RU	RW	RD	WH	GR	BL
		3W	B	1	3	SE	SA	AT	RU	RW	RD	WH	GR	BL
		6W	B	1	3	SE	SA	AT	RU	RW	RD	WH	GR	BL

OUTPUT IN EMERGENCY MODE [lm]

	OUTPUT [lm]	
	POWER	ETL
STANDARD	1W	170
	2W	285
	3W	430
PREMIUM	1W	180
	2W	340
	3W	455
	6W	850

CENTRAL BATTERY CONFIGURATION - NON-ADDRESSABLE

CODE	POWER	MODULE	SYSTEM	OPTIONS		COLOR		
ETL	1W	F	CB	CBS	X	WH	GR	BL
	2W	F	CB	CBS	X	WH	GR	BL
	3W	F	CB	CBS	X	WH	GR	BL
	6W	F	CB	CBS	X	WH	GR	BL

OUTPUT IN EMERGENCY MODE [lm]

	OUTPUT [lm]	
	POWER	ETL
	1W	180
	2W	340
	3W	455
	6W	850

CENTRAL BATTERY CONFIGURATION – ADDRESSABLE

CODE	POWER	MODULE	SYSTEM	OPTIONS		COLOR		
ETL	1W	Z	CB	ADE	ADP	WH	GR	BL
	2W	Z	CB	ADE	ADP	WH	GR	BL
	3W	Z	CB	ADE	ADP	WH	GR	BL
	6W	Z	CB	ADE	ADP	WH	GR	BL

OUTPUT IN EMERGENCY MODE [lm]

	OUTPUT [lm]	
	POWER	ETL
	1W	180
	2W	340
	3W	455
	6W	850

FZLV SYSTEM CONFIGURATION

CODE	POWER	SYSTEM		COLOR		
ETL	1W	FZLV	FZLV2	WH	GR	BL
	2W	FZLV	FZLV2	WH	GR	BL
	3W	FZLV	FZLV2	WH	GR	BL
	6W	FZLV	FZLV2	WH	GR	BL


OUTPUT IN EMERGENCY MODE [lm]

	OUTPUT [lm]	
	POWER	ETL
	1W	180
	2W	340
	3W	455
	6W	850


LEGEND:

ETL	fixture EXIT L	RW	Rubic UNA Wireless central monitoring
E, C	electronic gear for STANDARD self-contained fittings	RD	DALI central monitoring
B	electronic gear for PREMIUM self-contained fittings	FZLV	central battery FZLV 24 VDC
F	electronic gear for central battery fittings	FZLV2	central battery FZLV II 48 VDC
Z	electronic gear for addressable central battery fittings	CB	central battery version
SE	non maintained	CBS	central battery for circuit monitoring
SA	maintained	ADP	address module for CBS 1.0 – SMART technology
PT	manual test button	ADE	address module for CBS 2.0 – SMART technology
X	fitting without additional options	WH	white color
AT	autotest	GR	grey color
RU	Rubic UNA central monitoring	BL	black color


EXIT L EXAMPLE OF PHOTOMETRY

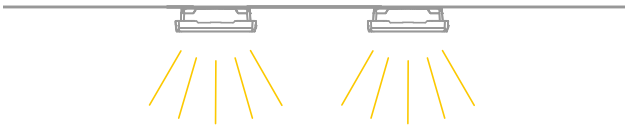


Opticfor open area

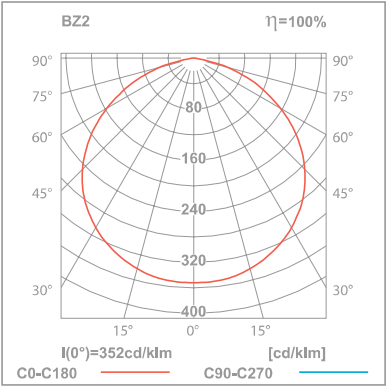

simulation for four luminaires and min 0,5 lx (area)

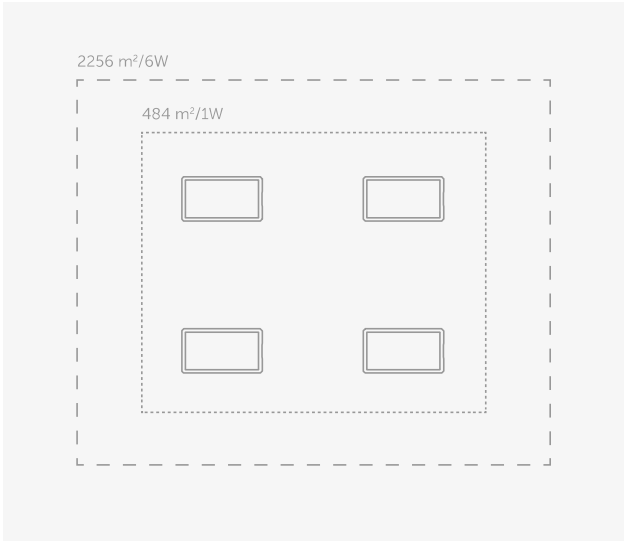



EXIT L

AC
220-240V
50-60Hz

DC
176-275V

DC
24V

DC
48V

LED

IP65

IK08



d=30mm



Ni-Cd



LiFePO₄



KM 618355
BS-EN 60598-2-22



MATERIALS

White, grey or black polycarbonate body • Transparent or opal polycarbonate cover • Plexi glass

MOUNTING

Surface • Optionally recessed⁽¹⁾ • Optionally pendant⁽²⁾

POWER SUPPLY

Self contained – 220 - 240VAC/50 - 60Hz
Central battery – 220 - 240VAC/50 - 60Hz; 176 - 275VDC
Central battery FZLV II – 48VDC
Central battery FZLV – 24VDC

LIGHT SOURCE

1W, 2W LED
Colour temperature: 6000K
Lifetime: 50000h

CHARGING

Standard: max. 24h
Premium: max. 12h; energy-saving electronic charger

AUTONOMY AND BATTERIES

Standard: 1h or 3h, Ni-Cd 3,6V batteries
Premium: 1h or 3h, LiFePO₄ 6,4V batteries

INSULATION CLASS

II or III

IP & IK RATING

IP65, IK08

VIEWING DISTANCE

30 m

VIEWING METHOD

Single sided or double-sided⁽³⁾

AMBIENT TEMPERATURE

Self-contained: t_a: 0°C ÷ 40°C • t_a: -25°C ÷ 40°C – together with heater for low temperatures
Central battery: t_a: -25°C ÷ 50°C


OPTIONS

SE – non maintained • SA – maintained • AT – autotest • PT – manual test button
• RU – Rubic UNA central monitoring • RW – Rubic UNA Wireless central monitoring
• RD – DALI central monitoring • FZLV – central battery FZLV 24VDC • FZLV2 – central battery FZLV II 48VDC • CB – central battery

ADDITIONAL INFORMATION

LED indicator signalizes mains power supply and battery charge • Deep discharge protection
• Optional adaptation of the fixture for low temperatures up to -25°C with HTR 25
• III class of insulation of FZLV and FZLV2 version • ⁽¹⁾ see accessory for recessed mounting
• ⁽²⁾ see accessory for recessed mounting, RW option not available • ⁽³⁾ see accessory for two-sided pictogram • ⁽⁴⁾ 1pc of universal pictogram is included in each single box

DIMENSIONS [mm]

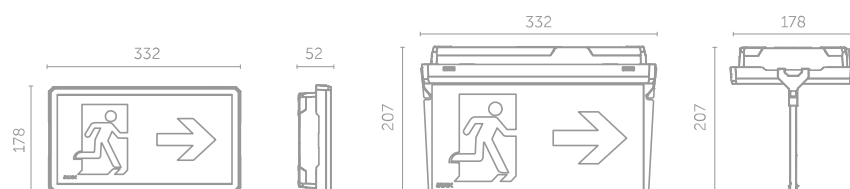

⁽⁴⁾ pictogram

SELF-CONTAINED CONFIGURATION

	CODE	POWER	MODULE	AUTONOMY [h]		MODE		OPTIONS			COLOR			COVER		
STANDARD	ETL	1W	E C	1	3	SE	SA	PT	AT	X	WH	GR	BL	TR	OP	
		2W	E C	1	3	SE	SA	PT	AT	X	WH	GR	BL	TR	OP	
PREMIUM	ETL	1W	B	1	3	SE	SA	AT	RU	RW	RD	WH	GR	BL	TR	OP
		2W	B	1	3	SE	SA	AT	RU	RW	RD	WH	GR	BL	TR	OP

CENTRAL BATTERY CONFIGURATION - NON-ADDRESSABLE

CODE	POWER	MODULE	SYSTEM	OPTIONS		COLOR			COVER	
ETL	1W	F	CB	CBS	X	WH	GR	BL	TR	OP
	2W	F	CB	CBS	X	WH	GR	BL	TR	OP

CENTRAL BATTERY CONFIGURATION – ADDRESSABLE

CODE	POWER	MODULE	SYSTEM	OPTIONS		COLOR			COVER	
ETL	1W	Z	CB	ADE	ADP	WH	GR	BL	TR	OP
	2W	Z	CB	ADE	ADP	WH	GR	BL	TR	OP

FZLV SYSTEM CONFIGURATION

CODE	POWER	SYSTEM		COLOR			COVER	
ETL	1W	FZLV	FZLV2	WH	GR	BL	TR	OP
	2W	FZLV	FZLV2	WH	GR	BL	TR	OP

LEGEND:

ETL	fixture EXIT L
E, C	electronic gear for STANDARD self-contained fittings
B	electronic gear for PREMIUM self-contained fittings
F	electronic gear for central battery fittings
Z	electronic gear for addressable central battery fittings
SE	non maintained
SA	maintained
PT	manual test button
X	fitting without additional options
AT	autotest
RU	Rubic UNA central monitoring
RW	Rubic UNA Wireless central monitoring
RD	DALI central monitoring
FZLV	central battery FZLV 24 VDC
FZLV2	central battery FZLV II 48 VDC
CB	central battery version
CBS	central battery for circuit monitoring
ADP	address module for CBS 1.0 – SMART technology
ADE	address module for CBS 2.0 – SMART technology
WH	white color
GR	grey color
BL	black color
TR	transparent polycarbonate cover
OP	opal polycarbonate cover




EXIT accessories



ACCESSORY FOR RECESSED MOUNTING (SET)

CODE: ETS/REC – EXIT S
ETE/REC – EXIT M
ETL/REC – EXIT L

DIMENSIONS [mm]

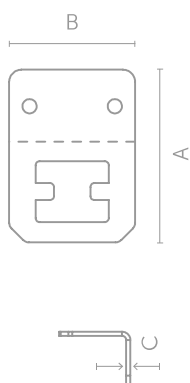


Dimensions: (AxBxC):

EXIT S: 36x36x1,5

EXIT M: 42x31x1,5

EXIT L: 37x34x1,5


FITS TO EXIT S, M, L

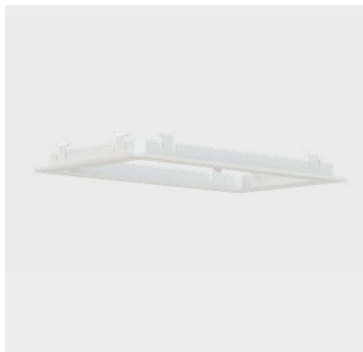

ACCESSORY FOR RECESSED MOUNTING (SET)

CODE: ETS/REC2

DIMENSIONS [mm]

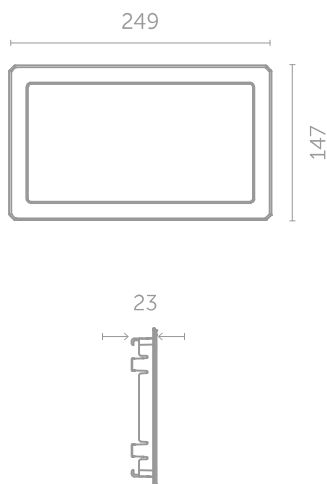


FITS TO EXIT S



ACCESSORY FOR PENDANT MOUNTING

CODE: ETE/PEN2

DIMENSIONS [mm]

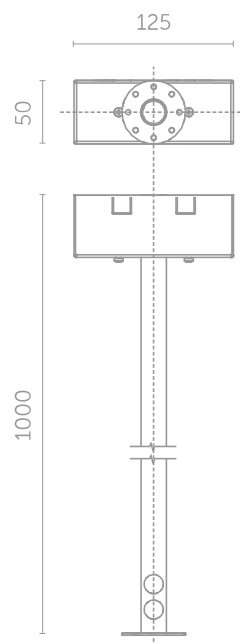

FITS TO EXIT S, M, L






PLEXI GLASS (SET)


CODE: ETE/PLX

* 1PC OF UNIVERSAL PICTOGRAM IS
INCLUDED IN EACH SINGLE BOX

DIMENSIONS [mm]

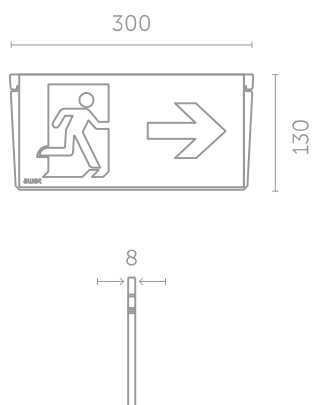

FITS TO EXIT M

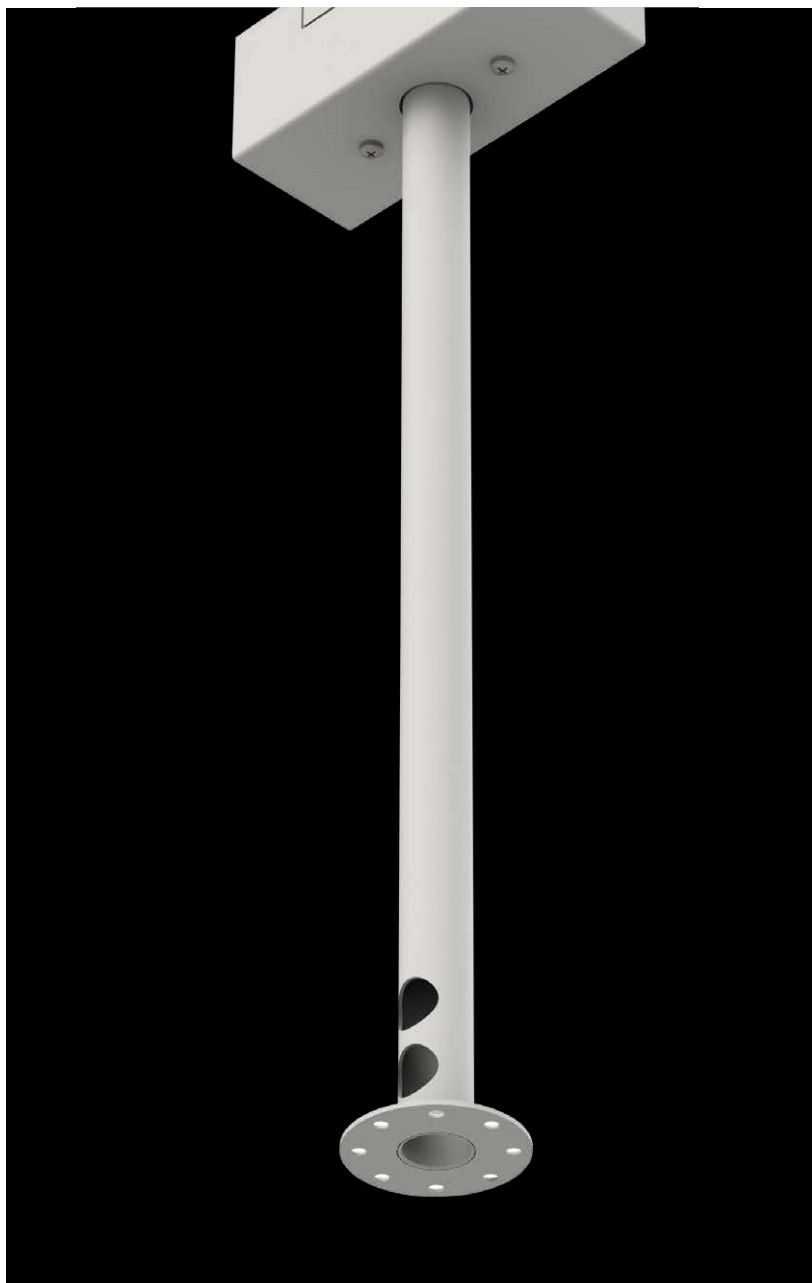




PLEXI GLASS (SET)

CODE: ETS/PLX - EXIT S
ETL/PLX - EXIT L
* 1PC OF UNIVERSAL PICTOGRAM IS
INCLUDED IN EACH SINGLE BOX

DIMENSIONS [mm]

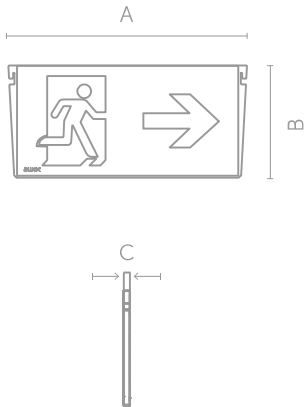

Dimensions:(AxBxC):
EXIT S: 224x107x6
EXIT L: 330x155x8


FITS TO EXIT S, L




ADJUSTABLE HANDLE 0-90°

CODE: 3001

DIMENSIONS [mm]

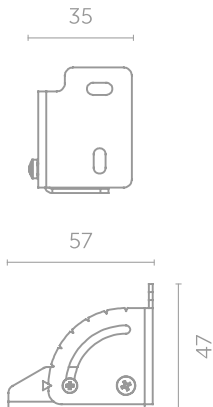


FITS TO EXIT M, L

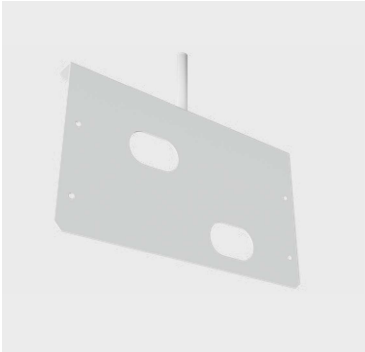

CEILING BRACKET WITH PIPE

CODE: 2945 – EXIT S
2946 – EXIT M
2947 – EXIT L


DIMENSIONS [mm]




Dimensions (mm): (AxBxC):
EXIT S: 202x121x428
EXIT M: 250x142x449
EXIT L: 300x172x479

FITS TO EXIT S, M, L



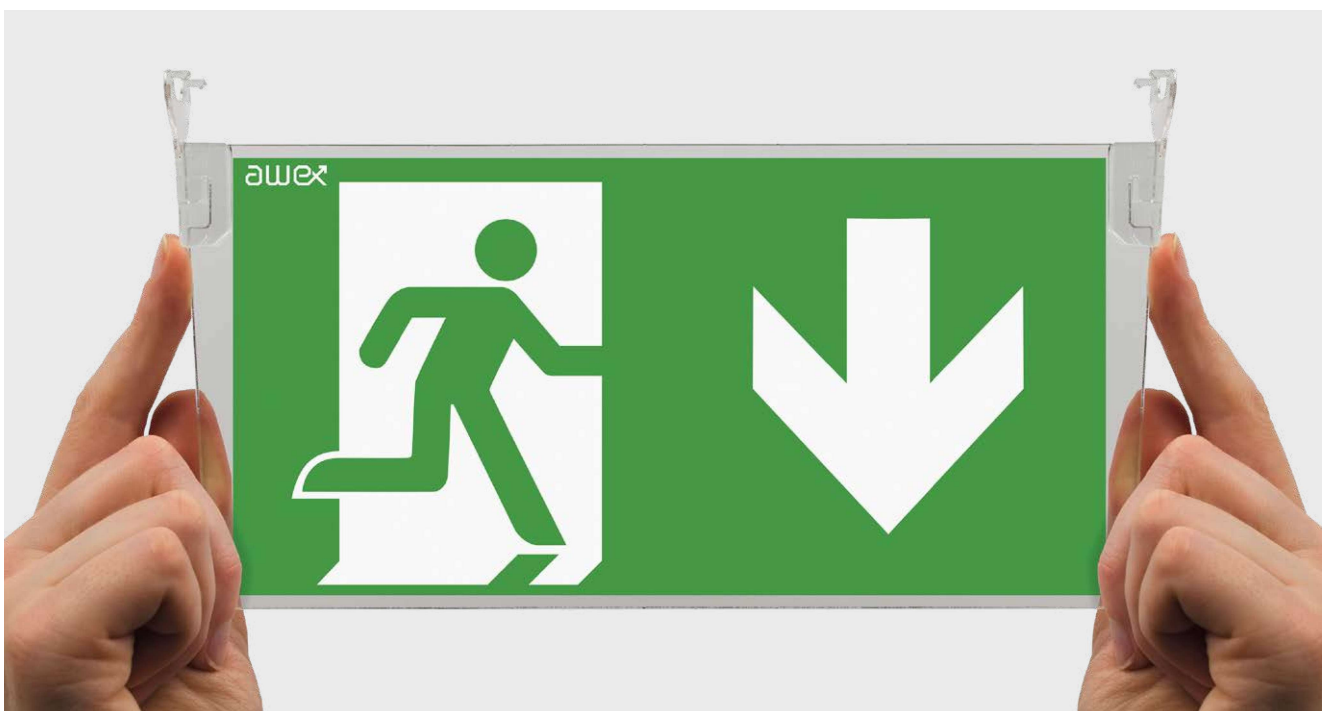


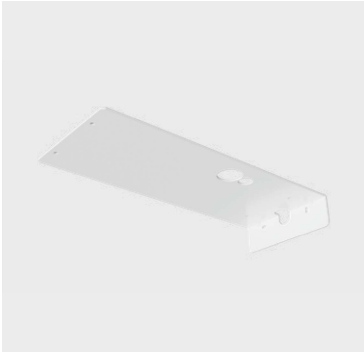

WALL BRACKET


CODE: 1906 – EXIT S
1907 – EXIT M / EXIT M DS
1908 – EXIT L

DIMENSIONS [mm]

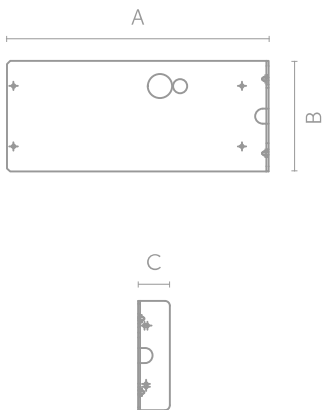

Dimensions (mm): (AxBxC):
EXIT S: 202x121x26
EXIT M: 250x142x33
EXIT L: 300x172x33


FITS TO EXIT S, M, L

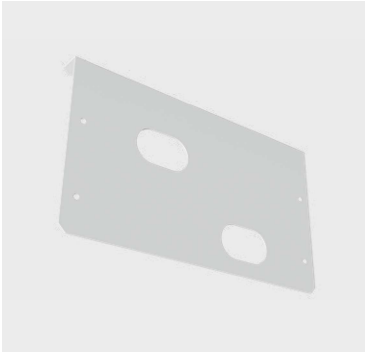

CEILING BRACKET

CODE: 1903 – EXIT S
1904 – EXIT M / EXIT M DS
1905 – EXIT L

DIMENSIONS [mm]

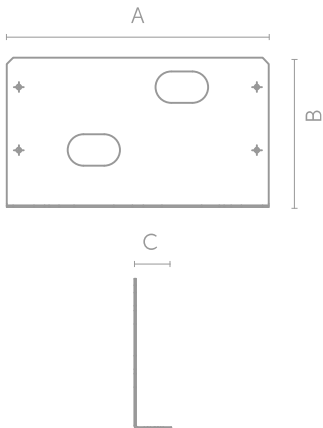

Dimensions (mm): (AxBxC):
EXIT S: 202x121x26
EXIT M: 250x142x33
EXIT L: 300x172x33


FITS TO EXIT S, M, L



**ACCESORY FOR ROPE
SUSPENSION (SET)**

CODE: ET/ALIN


DIMENSIONS [mm]

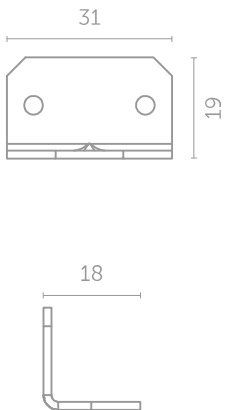

Dimensions (mm): (AxBxC):
EXIT S: 202x121x26
EXIT M: 250x142x33
EXIT L: 300x172x33

FITS TO EXIT M, L



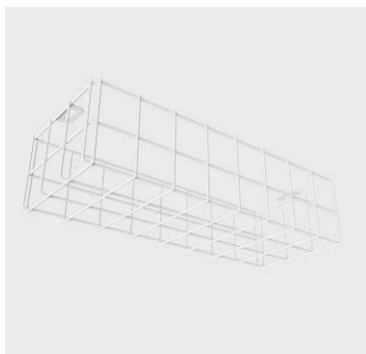


WIRE GUARD

CODE: 1012 – EXIT S

1013 – EXIT M

1014 – EXIT L

DIMENSIONS [mm]



Dimensions: (AxBxC):

EXIT S: 255x145x60

EXIT M: 305x200x60

EXIT L: 415x215x75

FITS TO EXIT S, M, L

