


Datasheet


PROLED PANEL RGBW

PROLED[®]

Article number: L8000000
Article name: PROLED PANEL RGBW
Article description: PROLED PANEL 600 RGBW
GTIN: 4251158432953

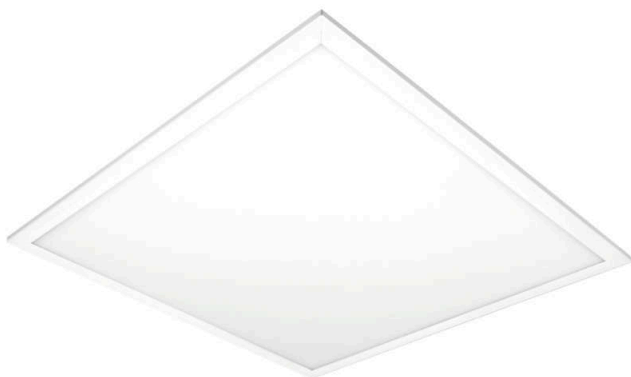

picture similar

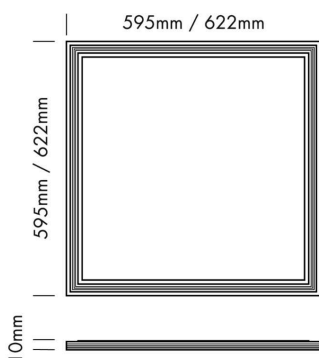

Article description:

slim RGBW LED PANELL

- for grid ceiling 600 x 600 mm and 625 x 625 mm
- dimmable, autom. colour change, DMX 512, DALI, 1-10 V, KNX controllable by PROLED RGBAW MULTI power supplies/controller
- for wall or ceiling mounting (with optional mounting bracket)
- for suspension (with optional suspension set)

Date: 16.8.2024

Technical amendments and errors reserved.

PROLED[®]

MBN GmbH | Balthasar-Schaller-Str. 3 | 86616 Friedberg | Germany

Phone +49.821.60099-0 | Fax +49.821.60099-99


Central: info@proled.com | Internet: www.proled.com

Registered office of the company: Friedberg | Amtsgericht Augsburg HRB 19419 | Managing Director: Dr. Bernhard Steidl, Christian von Sassen

Photometrical properties:

Light flux:	4300 lm
Light flux red:	250 lm
Light flux green:	850 lm
Light flux blue:	200 lm
Light flux white:	3300 lm
Color appearance:	RGBW
CCT:	4000 K
CRI:	80
Beam angle:	120 °

Electrical properties:

Voltage supply:	24 VDC
Polarity connection:	Common Anode (CA)
Electrical safety class:	III
Power consumption:	73 W
Luminaire luminous efficacy:	59 lm/W
EEC (EU 2019/2015):	
Control:	with separate controller

Technical properties:

IP safety class:	IP40
Adjustable:	not adjustable
Cover:	Microprism
Reflector surface:	matt

Housing and size:

Size:	595 x 595 x 10 mm (l x w x h)
Housing colour:	white
Housing material:	alu
Housing surface:	matt
Product weight:	3,300 kg

Mounting instructions:

For outdoor use:	–
Mounting place:	Wall-ceiling mounting, Pendulum mounting
Mounting type:	clampable
Operating device:	excl. driver
Ambient temperature:	-10 °C to 45 °C
Average lifetime**:	50.000 h at L ₈₀ /B ₁₀

** With correct installation and suitable thermal management.

Flags:

