

# ARCA 403021S



Sample image

**Order symbol :** ARCA 403021S

**Product nr :** 8120087

UL Code : UL508A

**Description :** Cabinet, PC


**Remarks :** Grey cover, Swinghandle, hinges on the long side

**EAN :** 6418074079701

**El. number :**

- Finland : 3423166
- Denmark : 8212091579
- Sweden : 2507094

**Including :** Cabinet base. door with PUR gasket. mounting plate. screws for mounting plate. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. Door guide included.

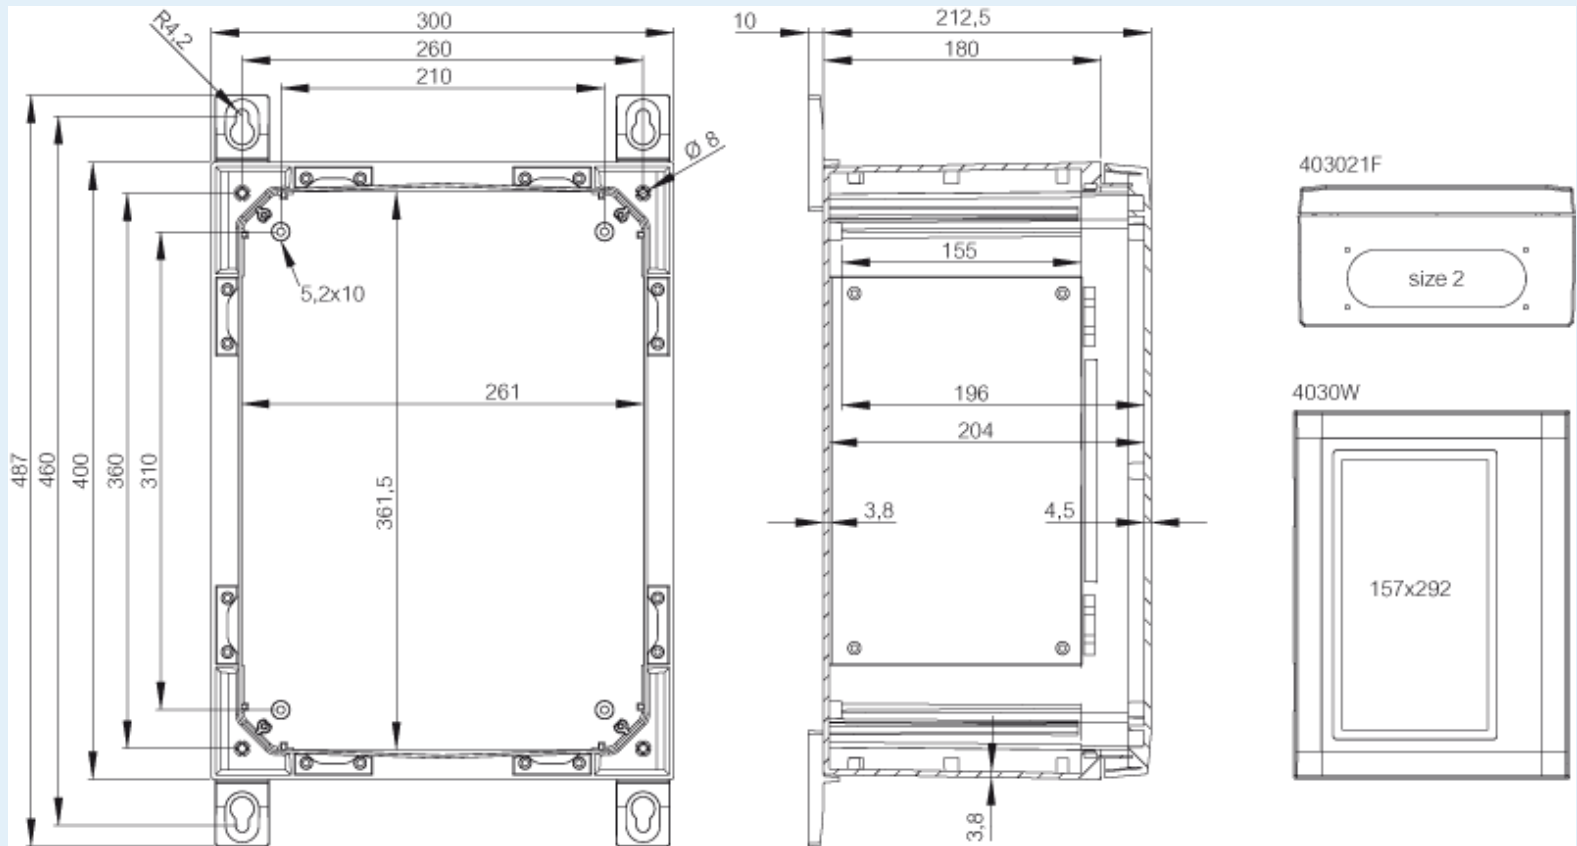

**Dimensions :**

mm :

**Height**

400

**Width**

300

**Depth**

210

**Accessories :**

DRS ARCA

DIN rail frame set

inch : 11.81 15.75 8.58

**Materials :**

Material : Polycarbonate  
Base colour : RAL\_7035  
Cover colour : RAL 7035 -light grey  
Gasket material : Polyurethane

**Temperatures :**

Temperature °C (continuous) : -40 ... 80  
Temperature °F (continuous) : -40 ... 175

403021 (385 x 285 x 35)  
RCS ARCA 4030 Rain canopy set for size 4030 (30 x 300 x 20)  
IDS ARCA 4030 Inner door set (385 x 285 x 35)  
PMK ARCA 30 PoleMounting kit, for pole ø100-300mm (385 x 285 x 35)  
DSP ARCA VLS Door stopper ARCA, vertical, left, small (15 x 104 x 16)  
MPMP ARCA 4030 Mounting plate multiperforated (350x250x2 mm - ø3.6 mm) (350 x 250 x 1.5)  
DSP ARCA VRS Door stopper ARCA, vertical, right, small (15 x 104 x 16)  
MPS ARCA 4030 Mounting plate (350x250x2 mm) (350 x 250 x 2)  
MPP ARCA 4030 Mounting plate perforated (350x250x2 mm - 26x11 mm) (350 x 250 x 2)  
MPX ARCA 4030 Mounting plate (350x250 mm) (350 x 250 x 5)

**Ratings :**

Ingress protection (EN 60529): IP66;  
Impact Resistance (EN 62262): IK10;  
electrical\_insulation : Totally insulated  
Halogen free (DIN/VDE 0472, Part 815) : Yes  
UV resistance : UL 746C  
Flammability Rating : UL 94 5VA  
Glow Wire Test (IEC 695-2-1) °C : 960C

**Certificates :**

Certificate FI 40467