


Drum Wall IP UpDown





Wall light with light emission on two sides (50% up - 50% down). Ideal as a lighting element for facade lighting or for entrance areas.

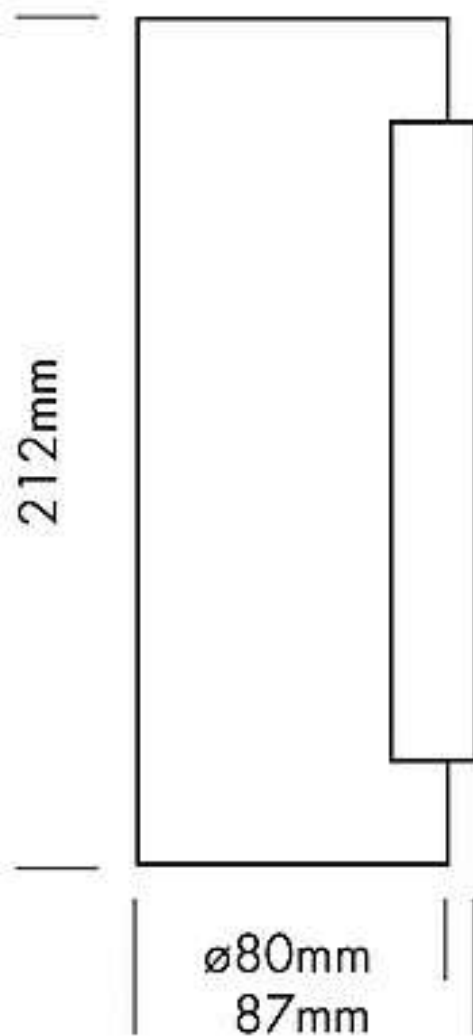

EULUMDAT/IES INFORMATION

TECHNICAL DATA

IP classification

IP65 (for outdoor use)

Power source	220-240 VAC 50/60 Hz
Housing	aluminium black
Driver	including (350 mA)
Electrical connection	3x terminalblock
Average lifetime	50.000 h at L80/B10
Operating temperature range	-10° C till +45° C
Dimmable	no

PHOTOMETRIC DATA

LED type	BRIDGELUX COB
Luminous flux	warm white 1200 Lumen
Colour temperature	warm white 3000 K
CRI	90
Beam angle	36°

Due to conditions of production photometric data can vary from production batch to production batch within the EU directive.

PRODUCT TYPES

order code	colour	power consumption*	weight	EEC
UDRWIP2630B	warm white	14 Watt	1,11 kg	E

*Actual power consumption

MEMBER OF THE PROLED GROUP