



# FIXO CEE combination units

with attachment plug for the power connection



### Stable handle

fast suspension  
for temporary applications

### Housing

made of special plastic  
highly shock-resistant

### Fuses

RCD and MCB



### Shock-proof socket outlets

two sockets on one phase  
230 V / 16 A




### CEE socket

400 V / 16 A / 5-pole



### CEE socket

400 V / 32 A / 5-pole

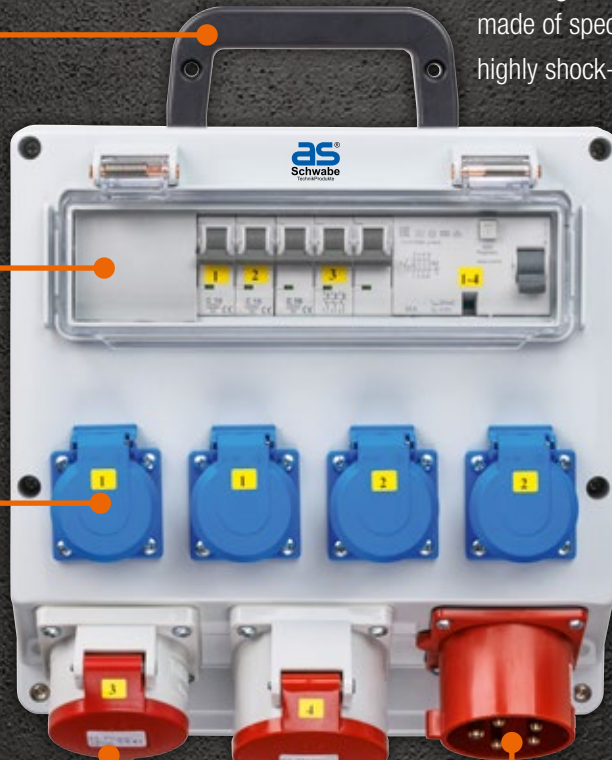

### Connection plug

to use with standard  
extension cord equipped  
with CEE connector

Back view  
with drill markings  
for wall mounting



# FIXO CEE combination units

with attachment plug for the power connection



## Technical data

- Robust housing made from shatterproof special plastic, including carry handle
- Perfectly suited to wall attachment thanks to the flat construction
- Housing dimensions FIXO: 280 x 235 x 118 mm  
Housing dimensions FIXO MAX: 370 x 375 x 118 mm
- Tested in accordance with DIN EN 61439-3
- **IP44**: protected against foreign bodies and splash-proof



**FIXO 2 MAX**



**FIXO 3**



**FIXO 4**



All models are wired ready for connection.

## FIXO 2 MAX

Input **16 A**, approx. 11 kW



CEE plug 400 V, 16 A, 5-pole

Output

6x shock-proof socket outlets 230 V, 16 A  
3x CEE sockets 400 V, 16 A, 5-pole



Protection

1x RCD 40 A, 4-pole, 30 mA, Typ A  
3x MCB B 16 A, 1-pole

EAN 4011160615146  
Art. no. 61514

## FIXO 3

Input **32 A**, approx. 22 kW



CEE plug 400 V, 32 A, 5-pole

Output

4x shock-proof socket outlets 230 V, 16 A  
2x CEE sockets 400 V, 16 A, 5-pole



Protection

1x RCD 40 A, 4-pole, 30 mA, Typ A  
2x MCB C 16 A, 3-pole  
2x MCB C 16 A, 1-pole

EAN 4011160615177  
Art. no. 61517

## FIXO 4

Input **32 A**, approx. 22 kW



CEE plug 400 V, 32 A, 5-pole

Output

4x shock-proof socket outlets 230 V, 16 A  
1x CEE socket 400 V, 16 A, 5-pole  
1x CEE socket 400 V, 32 A, 5-pole



Protection

1x RCD 40 A, 4-pole, 30 mA, Typ A  
1x MCB C 16 A, 3-pole  
2x MCB C 16 A, 1-pole

EAN 4011160615122  
Art. no. 61512