

# Downlight *Tilt*

DWN-01

DWN-01 is a smart downlight with tunable white and a built-in dimmer function. No external dimmer is to be used. The light source in Downlight Tilt can be angled sideways to vary the lighting in the room. The product can be grouped wirelessly and controlled through the app, other products from Plejd, or wired push button. It can also be controlled automatically with built-in time functions such as scheduling.

DWN-01 has adjustable color temperature and can be set to a fixed temperature or dim to warm.



## Light data

Luminous flux	590 lm (total) 515 lm (useful)
Tunable white	2,200-4,000 K
Beam angle	40°
Tiltable	28°
Dimming	0.1-100 %
Ra	90
SDCM	3
L70/B50	60,000 h
Light source	LED (non user replaceable)



## Technical data

IP rating	Luminaire: IP44 Driver: IP20
Protection	Overtemperature protection
Protection class	Class II
Permissible ambient temperature	-25 to +35 °C
Maximum power consumption	8 W
Energy efficiency class	F
Mains electricity	230 V~ 50 Hz
Maximum bypass current	16 A
Power factor (PF)	0.84
Standby power	Pno, Psb: N/A Pnet: 0.09 W
Cable area	0.75-2.5 mm <sup>2</sup>
Installation depth	40 mm
Isosafe/Insulation	Ta 25°C installed directly against insulation. Ta 35°C ceilings without insulation.
Operating environment	Indoor/outdoor (e.g. eaves)
<b>Radio</b>	
2.4 GHz mesh	Radio range: approx. 10 m indoors.
Bluetooth®	The Plejd mesh technology extends the range by allowing the units to communicate with each other.
<10 dBm	

## Article list

Article list	Color
DWN-01-W	White (RAL 9003)
DWN-01-B	Black (RAL 9004)
DWN-01-W 6-pack	White (RAL 9003)
DWN-01-B 6-pack	Black (RAL 9004)

## Color

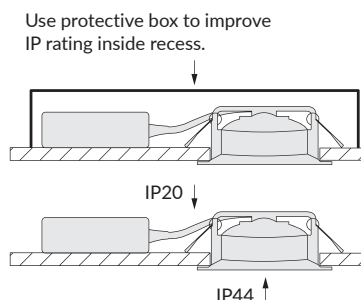

**NOTE!** Do not connect input 1 between several products. Use the app to configure the control and connection of several devices in a group.

