

Farsund Slim 300



Farsund Slim 300 Black 1670lm 2700K Ra>80 Trailing edge

Article code: 113309
EAN: 7021981133092



Electrical

System wattage: 14W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 130, B16: 200, C10: 130, C16: 200

Light technic

Type of light source: LED
Luminous flux: 1670lm
Efficacy: 119 lm/W
Colour temperature: 2700K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Lifetime: L90/B50>50,000
Minimum ambient temperature: -20°C
Light distribution: Direct
Beam angle: 109°
Visible flicker (PstLM): 0.01
Stroboscopic flicker (SVM): 0.01

Control/Dimming

Type: Trailing edge

Protection

Luminaire class: Class II
IP Class: IP20

Energy and approvals

Contains light source of energy class: C
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Polycarbonat (PC)
Colour: Black
Optics: Plastic, opal

Mounting/Connection



Mounting: Surface, Indoor
Connection: Screwless terminal block

Dimensions

Height (mm) H: 29
Diameter (mm) D: 302
Weight (kg) gross/net: 1.071 / 0.942

Packaging

Packing dimensions (mm): 316 x 316 x 34

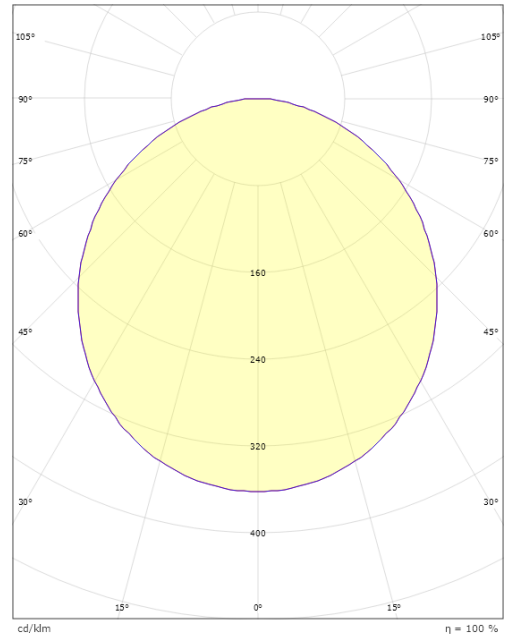

cd/kdm
— C0/C180
— C90/C270

η = 100 %



7 0 2 1 9 8 1 1 3 3 0 9 2