

# Junistar Square IsoSafe DimToWarm



## Junistar Square IsoSafe DimToWarm White 550lm 2000-2800K Ra>95 Trailing edge

SG code: 901251  
EAN: 7021989012511




### Electrical

Wattage: 7W  
System wattage: 8W  
Voltage: 220-240V  
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51



### Light technic

Type of light source: LED  
Luminous flux: 550lm  
Efficacy: 69 lm/W  
Colour temperature: 2000-2800K  
Colour rendering (Ra): Ra>95  
MacAdams factor: SDCM: 3  
Lifetime: L90/B10>50,000  
Light distribution: Direct  
Optic: Reflector  
Beam angle: 42°  
UGR: UGR<22

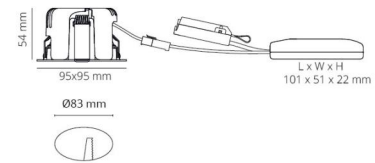

### Control/Dimming


Type: Trailing edge

### Protection

Luminaire class: Class II SELV  
IP Class: IP44/IP20

### Energy and approvals

Contains light source of energy class: F  
Breeam: Fulfils Hea 01 for flicker free lighting

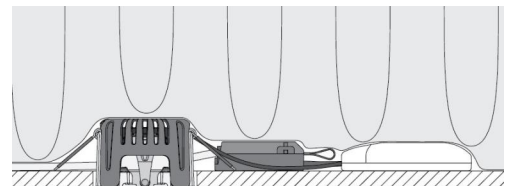

### Materials and finish

Housing: Aluminium  
Colour: Matte white (RAL 9003)  
Optics: Tempered glass

### Mounting/Connection


Mounting: Recessed, Indoor  
Connection: Screwless terminal block

### Dimensions

Length (mm) L: 95  
Width (mm) W: 95  
Height (mm) H: 56  
Cut-out (mm): 83  
Ceiling void depth (mm): 54  
Weight (kg) gross/net: 0.5 / 0.38

### Packaging

Packing dimensions (mm): 130 x 115 x 85

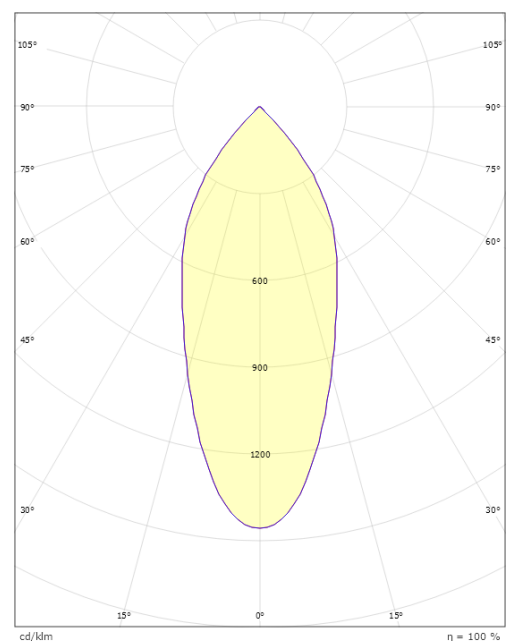

cd/klm  
— C0/C180  
— C90/C270



7 0 2 1 9 8 9 0 1 2 5 1 1