


# Soft Slim



## Soft Slim White 830lm 2700K Ra 98 Trailing edge dimming / Linect

Article code: 903214  
 EAN: 7021989032144



### Electrical

Wattage: 9W  
 System wattage: 11W  
 Voltage: 220-240V  
 Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

### Light technic

Type of light source: LED  
 Luminous flux: 830lm  
 Efficacy: 75 lm/W  
 Colour temperature: 2700K  
 Colour rendering (CRI): Ra 98  
 MacAdams factor: SDCM: 2  
 Lifetime: L90/B10>100,000  
 Light distribution: Direct  
 Optic: Reflector  
 Beam angle: 42°  
 UGR: UGR<19  
 Photobiological safety: RG 1



### Control/Dimming

Type: Trailing edge dimming / Linect

### Protection

Luminaire class: Class II SELV  
 IP Class: IP54/IP20

### Energy and approvals

Contains light source of energy class: F  
 Breeam: Fulfils Hea 01 for flicker free lighting  
 BVB: Yes

### Materials and finish

Housing: Aluminium  
 Colour: White  
 Optics: Tempered glass

### Mounting/Connection


Mounting: Recessed, Indoor / Outdoor  
 Connection: 3 pol Linect / screwless terminal block

### Dimensions

Height (mm) H: 52  
 Diameter (mm) D: 90  
 Cut-out (mm): 83  
 Ceiling void depth (mm): 51  
 Distance to flammable materials: 10mm  
 Weight (kg) gross/net: 0.42 / 0.385

### Packaging

Packing dimensions (mm): 130 x 115 x 85

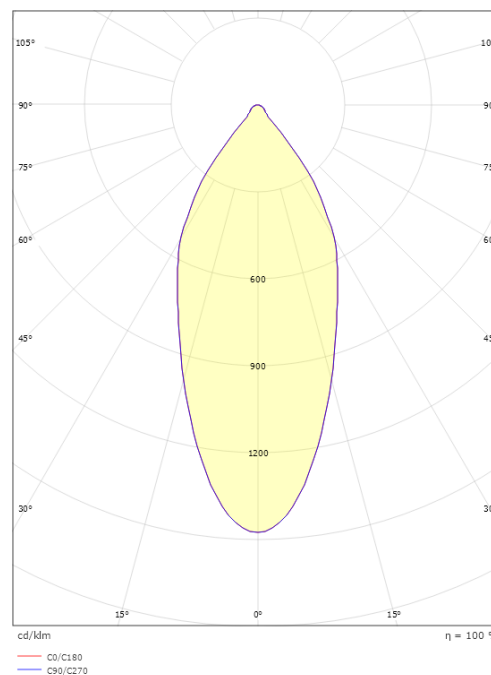

7 0 2 1 9 8 9 0 3 2 1 4 4