


# PRODUCT DATASHEET

## SF DISC SNM 220 V 14W ML 83040

SURFACE DISC SENSOR MICROWAVE | Modern wall and ceiling luminaire with microwave sensor, Multi Color and Multi Lumen

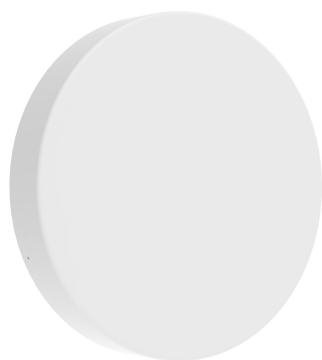

VALUE  
CLASS

### Areas of application

- Direct replacement for surface luminaires with integrated CFLni lamps
- Corridors
- Stairways
- Bathrooms
- Foyers

### Product benefits

- Multiple settings for sensor range, daylight detection, hold time and DIM-level /-period by DIP switches
- For 300 mm version: optional wired leader/follower function
- Highly versatile due to selectable CCT and power steps (Multi Color / Multi Lumen) on the driver
- Indoor luminaire with high luminous efficacy up to 120 lm/W
- High color consistency with SDCM 3
- Tool-free electrical connection due to push button connector
- Easy locking system to prevent unauthorized access

### Product features

- High frequency sensor for daylight, motion detection and corridor function
- Type of protection: IP54 (wall and ceiling)
- Impact resistance: IK10
- Lifetime (L80/B10): up to 75,000 h (at 25 °C)
- Polycarbonate (PC) housing, PC-diffuser



- Ambient temperature in operation: -20...+45 °C
- Glow Wire Test according to IEC 60695-2-12: 850 °C
- 3- or 5-pole terminal block, cable cross section up to 5 x 2.5 mm<sup>2</sup>
- Through-wiring possible
- Indoor use only, not suitable for outdoor use
- SF DISC family versions available: dimmable, on/off, DALI-2, sensor and/or emergency lighting function

## TECHNICAL DATA


### Electrical data

Nominal wattage	14 W / 9 W / 7 W
Nominal voltage	220...240 V
Mains frequency	50/60 Hz
Nominal current	65 mA
Inrush current	12 A
Inrush current time $T_{h50}$	250 $\mu$ s
Max. number of luminaires per miniature circuit breaker B16	25
Max. number of luminaires per miniature circuit breaker C10	25
Max. number of luminaires per miniature circuit breaker C16	40
Power factor $\lambda$	> 0.90
Total harmonic distortion	< 20 %
Protection class	II
Surge capability (L-N)	1000 V
Operating mode	Integrated LED driver


### Photometrical data

Luminous flux	1680 lm / 1080 lm / 720 lm <sup>1)</sup>
Luminous efficacy	120 lm/W
Color temperature	3000 K / 4000 K
Reference control setting of contained light source (Kelvin)	4000 K
Light color (designation)	Warm White / Cool White
Color rendering index Ra	> 80
Standard deviation of color matching	3 sdc <sub>m</sub>
Low flicker	Yes
Flickering metric (Pst LM)	<1
Stroboscope effect metric (SVM)	<0.4
Photobiological safety group acc. to EN62778	RG0
Beam angle	130 °

<sup>1)</sup> 1600 lm / 1020 lm / 680 lm @3000K

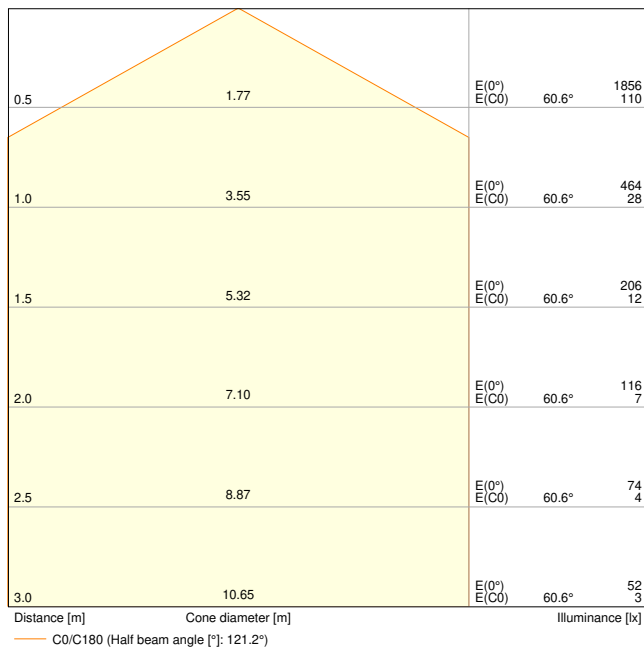

SF DISC 220 V 14W 840

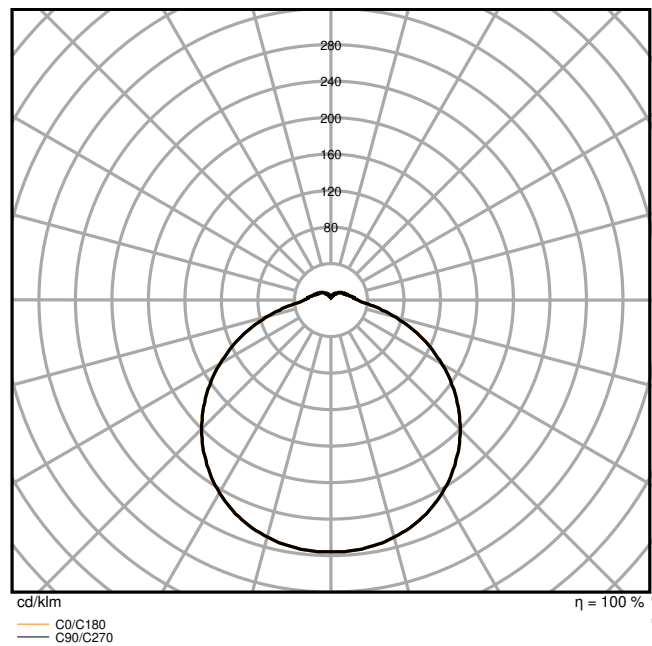


SF DISC 220 V 14W 840

Adjustable attributes

Nominal wattage	Color temperature	Luminous flux	Luminous efficacy
7 W	3000 K	680 lm	97 lm/W
7 W	4000 K	720 lm	103 lm/W
9 W	3000 K	1020 lm	113 lm/W
9 W	4000 K	1080 lm	120 lm/W
14 W	3000 K	1600 lm	114 lm/W
14 W	4000 K	1680 lm	120 lm/W

Dimensions & Weight

Diameter	220.00 mm
Height	52.00 mm
Product weight	635.00 g



SF DISC 220 V 14W ML

## Materials & Colors

Product color	White
Housing color	White
RAL Color (most similar)	RAL 9003
Body material	Polycarbonate (PC)
Cover material	Polycarbonate (PC)
Light emitting surface material	Polycarbonate (PC)
Glow Wire Test according to IEC 60695-2-12	850 °C
Mercury content	0.0 mg

## Application & Mounting

Ambient temperature range	-20...+45 °C
Temperature range at storage	-20...+80 °C
Type of connection	Push-in clamp
Type of protection	IP54
Protection class IK (shock resistance)	IK10
Dimmable	No
Mounting type	Surface
Mounting location	Ceiling / Wall
Application environment	Indoor
Adjustable	No
With light source	Yes
Replaceable light source	No

## Lifespan

Lifespan L70/B50 at 25 °C	100000 h <sup>1)</sup>
Lifespan L80/B10 at 25 °C	75000 h <sup>1)</sup>
Lifespan L80/B50 at 25 °C	75000 h
Number of switching cycles	100000

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

## Control gear

Output current	330 mA
ECG - Output ripple current	< 5 %

## Sensor

Type of sensor	Motion
Sensor technology	Microwave
Sensor detection angle	120 °
Sensor controlled switching time	5 s...20 s
Detection range of motion sensor	2...6 m
Detection threshold of daylight sensor	5...170 lx

## Certificates & Standards

Standards	CE / CB / UKCA / EAC / ENEC / RED / EPD
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
EPD	LEDV-00067-V01.01-EN
Replaceable light source (EPREL)	Only by an expert

## Additional product data

Product remark	Available from December 2025
Added function	MULTI SELECT




## EQUIPMENT / ACCESSORIES






- Mounting screws and dowels included






## Safety advice



- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.


## DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	G11247949 SF DISC
	Legal information	G11249437 Light Source Insert
	Legal information	Safety Insert G11252364

Documents and certificates		Document name
	Legal information	Legal Insert G11252360
	Legal information	ECO PANEL
	Declarations of conformity	SF DISC
	Declarations of conformity UKCA	SF DISC
	EPD	EPD EN SURFACE DISC

Photometric and lighting design files		Document name
	IES file (IES)	SF DISC 220 V 14W 840
	LDT file (Eulumdat)	SF DISC 220 V 14W 840
	UGR file (UGR table)	SF DISC 220 V 14W 840
	Light distribution curve type cone	SF DISC 220 V 14W 840
	Light distribution curve type polar	SF DISC 220 V 14W 840

CAD/BIM files		Document name
	BIM Revit 3D	Surface Disc
	CAD STEP 3D	SF DISC 220 V 14W ML



Tender texts		Document name
	Tender documents	SURFACE DISC SENSOR MICROWAVE SNM 220 V 14W ML 83040-en

**LOGISTICAL DATA**

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854640469	Folding box 1	59 mm x 230 mm x 230 mm	735.00 g	3.12 dm <sup>3</sup>
4099854640476	Shipping box 6	372 mm x 252 mm x 264 mm	5000.00 g	24.75 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.



ADDITIONAL CATALOG INFORMATION



SURFACE DISC 220					
*P [W]	7	9	14		
CCT [K]	3000	4000	3000	4000	3000
**Phi_v [lm]	680	720	1020	1080	1600
***Eff. [lm/W]	97	103	113	120	114

SURFACE DISC 300					
*P [W]	9	15	21		
CCT [K]	3000	4000	3000	4000	3000
**Phi_v [lm]	1030	1080	1710	1800	2394
***Eff. [lm/W]	114	120	114	120	114

SF DISC 300 DIM/DALI	
*P [W]	21
CCT [K]	3000
**Phi_v [lm]	2394
***Eff. [lm/W]	114

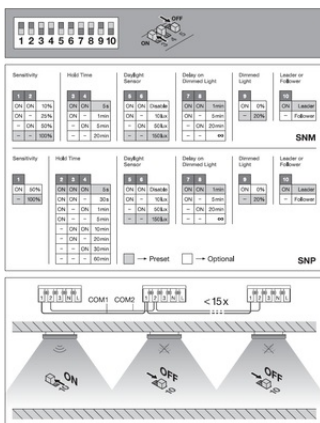

References / Links

- For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.