

## Arlon Black 1030lm 4000K Ra>80 Trailing edge

Article code: 653622  
 EAN: 7021986536225




### Electrical

System wattage: 10W  
 Voltage: 220-240V  
 Frequency (Hz): 50/60Hz  
 Max. luminaires per circuit breaker: B10: 31, B16: 50, C10: 52, C16: 85



### Light technic

Type of light source: LED  
 Light source included: Yes  
 Luminous flux: 1030lm  
 Efficacy: 103 lm/W  
 Colour temperature: 4000K  
 Colour rendering (Ra): Ra>80  
 MacAdams factor: SDCM: 3  
 Lifetime: L80/B20>100,000  
 Light distribution: Direct  
 Optic: Difuser  
 Visible flicker (PstLM): 0.08  
 Stroboscopic flicker (SVM): 0.75

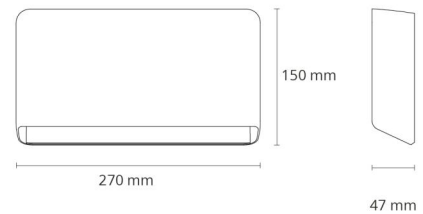

### Control/Dimming

Type: Trailing edge

### Protection

Luminaire class: Class II  
 IK Class: IK10  
 IP Class: IP65

### Energy and approvals

Contains light source of energy class: B  
 ULOR ( Yes

### Materials and finish

Housing: Aluminium  
 Colour: Black (RAL 9004)  
 Optics: Polycarbonat (PC)

### Mounting/Connection

Mounting: Wall, Outdoor  
 Connection: Screwless terminal block

### Dimensions

Length (mm) L: 270  
 Width (mm) W: 150  
 Height (mm) H: 47  
 Weight (kg) gross/net: 1.5 / 1.35

### Packaging

Packing dimensions (mm): 275 x 155 x 60

