


Junistar Soft White 830lm 2700K Ra 98 Trailing edge dimming / Linect

Article code: 903211
 EAN: 7021989032113




Electrical

Wattage: 9W
 System wattage: 11W
 Voltage: 220-240V
 Max. luminaires per circuit breaker: B10: 77, B16: 123, C10: 77, C16: 123

Light technic

Type of light source: LED
 Luminous flux: 830lm
 Efficacy: 75 lm/W
 Colour temperature: 2700K
 Colour rendering (CRI): Ra 98
 MacAdams factor: SDCM: 2
 Lifetime: L90/B10>100,000
 Light distribution: Direct
 Optic: Reflector
 Beam angle: 42°
 UGR: UGR<22
 Photobiological safety: RG 1



Control/Dimming

Type: Trailing edge dimming / Linect

Protection

Luminaire class: Class II SELV
 IP Class: IP54/IP20

Energy and approvals

Contains light source of energy class: F
 Breeam: Fulfils Hea 01 for flicker free lighting
 BVB: Yes

Materials and finish

Housing: Aluminium
 Colour: Matte white (RAL 9003)
 Optics: Tempered glass

Mounting/Connection


Mounting: Recessed, Indoor / Outdoor
 Connection: 3 pol Linect / screwless terminal block

Dimensions

Height (mm) H: 53
 Diameter (mm) D: 94
 Cut-out (mm): 83
 Ceiling void depth (mm): 51
 Distance to flammable materials: 10mm
 Weight (kg) gross/net: 0.46 / 0.41

Packaging

Packing dimensions (mm): 130 x 115 x 85

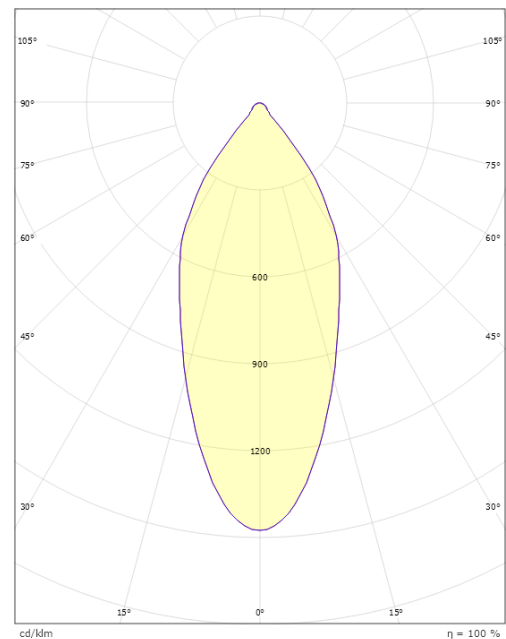

cd/kdm
 — C0/C180
 — C90/C270
 η = 100 %

